

meridian ellipse 6636

66" x 36" x 21"



Product No.

Model Rolled deck	TMU BMELOUMOT-XX	Soaker BMELOUMON-XX
Model Flat deck	TMU BMELOUNOT-XX	Soaker BMELOUNON-XX

ThermoMasseur (TMU)

Air Jet System	\$6,080
Jets	38
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

Soaker

	\$2,690
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

Features

Installation Type	Drop-in & Undermount
No. of bathers ♀♂ Imp. gallons 40 US gallons 48	
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Bath Pillow <i>BPILLOW</i>	\$240
Comfort Cushion <i>BCUSHIONA</i>	\$540
☐ Grey 05 ☐ Black 02	
Drain & Overflow	16" x 35" <i>BOVER16-XX</i>
☐ Chrome 07	\$260
☐ White 01 ☐ Biscuit 02	\$290
☐ Brushed Nickel 09	\$290
☐ Polished Nickel 10	\$290
☐ Oil-rubbed Bronze 11	\$400
☐ Matte Black 19 ☐ Satin Brass 18	N/A
If Required by Construction Code	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$240

⚠ Don't forget to indicate flat or rolled deck.

For Undermount installation specify a flat deck only.

** The AromaCloud® is built into the deck (factory installed).
Not available for Undermount installation.

https://bainultra.com/sites/default/files/product_files/product-sheet-meridian-ellipse-6636.pdf

meridian ellipse 6636

66" x 36" x 21"




Flat deck



Rolled deck



Technical Specifications

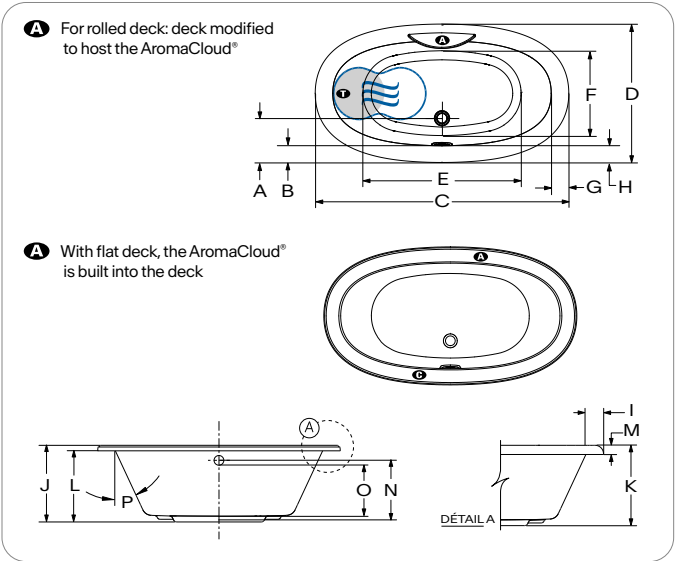

Letter	Description	Measure
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4 5/8"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width at backrest end	4 3/8"
H	Flat surface width	4 1/4"
I	Rolled deck width	4 3/4"
J	Height from bottom of bath to top deck	21"
K	Height from bottom of bath to top deck	22"
L	Height from bottom of bath to bottom of deck	19 1/2"
M	Height from bottom of deck to top deck	2 1/2"
N	Height from bottom of drain to center of overflow	16 5/8"
O	Maximum water level (Drain & overflow 16" x 35")	14 7/8"
P	Slope of backrest	25°

A AromaCloud® position **J** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **J** Indicates heated backrest (TMU)
P Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the rolled deck (see Drawing Detail A).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000104
Approx. shipping weight	100 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.