

amma 6032

60" x 32" x 21"



Product No.

Model	TMU BAMDRB00T-XX	Soaker BAMDRB00N-XX
-------	------------------	---------------------

ThermoMasseur (TMU)

Air Jet System	\$6,870
Jets	45
1 heated backrest & headrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045

Soaker

	\$4,260
AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers 1 Imp. gallons 39 US gallons 46 Raised seat 1 Inverted V 1 Armrests 2	
Standard Bath Color	
White 01 Biscuit 02	Included

Options UPCHARGE APPLICABLE

Skirt	BSMUL-XX	Multifit BSJI-XX	SJ-1
White 01 Biscuit 02		\$730	\$750
Tile Flange (specify right or left)			
Ordered with bath (not installed) BTILEN		\$85	
Factory-installed. Right BTILER, Left BTILEL Special installation BTILEO		\$165	
Bath Pillow BPILLOW		\$250	
Drain & Overflow	Integrated ZenFlow® BOVERINZF-XX	Integrated with trim BOVERIN-XX	16" x 35" BOVER16-XX
Chrome 07	\$215	\$245	\$275
White 01 Biscuit 02	\$175	\$215	\$305
Brushed Nickel 09	\$215	\$245	\$420
Polished Nickel 10	\$215	\$245	\$420
Oil-rubbed Bronze 11	N/A	N/A	\$420
Matte Black 19 Satin Brass 18	\$275	\$305	N/A
If Required by Construction Code			
Brass drain & overflow kit† BDRCOB		\$250	
Brass drain kit† BDRCB		\$65	
16" x 35" Cable driven brass drain & overflow kit BOVERBR		\$250	

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
‡ When ordered with Integrated drain & overflow.

amma 6032

60" x 32" x 21"




Molded heated headrest



Inverted V backrest

Technical Specifications

- A** When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

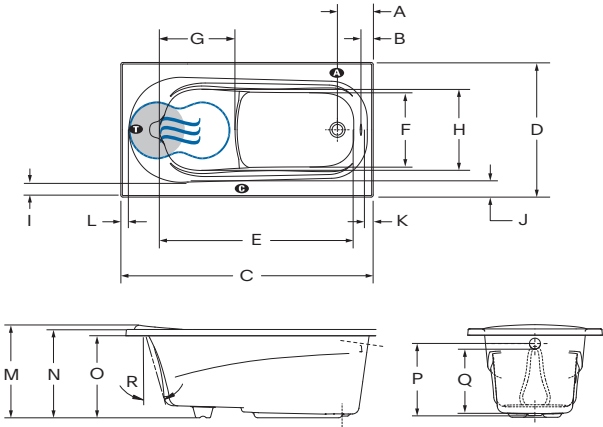

Letter	Description	Measure
A	Outside edge to center drain	8 1/2"
B	Outside edge to overflow	2 1/2"
C	Total length	60"
D	Total width	32"
E	Bathing well length	46 1/4"
F	Bathing well width at center zone	17 1/2"
G	Raised seat length	18"
H	Raised seat width	19 3/8"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	3 7/8"
K	Deck width at drain end	2"
L	Deck with backrest end	1 7/8"
M	Total height to headrest	22"
N	Height from bottom of bath to top deck	21"
O	Height from bottom of bath to bottom of deck	19 1/2"
P	Height from bottom of drain to center of overflow	17 1/8"
Q	Maximum water level (Drain & overflow 16" x 35")	15 5/16"
	Maximum water level (Integrated drain & overflow)	16 5/16"
R	Slope of backrest	16°

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **●** Indicates heated backrest (TMU)
⊕ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
Optional Tile Flange (specify right or left).	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	138 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.