

meridian 55

66" × 36" × 20"



Product No.

Model	TMU BMELRIOOT-XX	Soaker BMELRIOON-XX
-------	------------------	---------------------

ThermoMasseur (TMU)

Air Jet System	\$5,765
Jets	42
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045
2nd heated backrest (WTS-1 zone) BSHB	\$1,180

Soaker

AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$390

Features

Installation Type	Drop-in, Undermount & Alcove (3 walls)
No. of bathers ♀♂	Imp. gallons 39 US gallons 47
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Skirt	BSMUL-XX	Multifit BSJI-XX	SJ-1
☐ White 01 ☐ Biscuit 02		\$730	\$750
Tile Flange (specify right or left)			
Ordered with bath (not installed) BTILEN		\$85	
Factory-installed. Front BTILEF, Back BTILEB, Special installation BTILEO		\$165	
Bath Pillow BPILLOW		\$250	
Comfort Cushion BCUSHIONA		\$565	
☐ Grey 05 ☐ Black 02			
Drain & Overflow		Integrated ZenFlow† BOVERINZF-XX	16" x 35" BOVER16-XX
☐ Chrome 07		\$215	\$275
☐ White 01 ☐ Biscuit 02		\$175	\$305
☐ Brushed Nickel 09		\$215	\$305
☐ Polished Nickel 10		\$215	\$305
☐ Oil-rubbed Bronze 11		N/A	\$420
☐ Matte Black 19 ☐ Satin Brass 18		\$275	N/A
If Required by Construction Code			
16" x 35" Cable driven brass drain & overflow kit BOVERBR		\$250	
Brass drain & overflow kit† BDRCOB		\$250	
Brass drain kit† BDRCB		\$65	


† ZenFlow: Integrated overflow without a trim.
‡ When ordered with Integrated drain & overflow.
** The AromaCloud® is built into the deck (factory installed).
Not available for undermount intallation.

meridian 55

66" × 36" × 20"



Technical Specifications

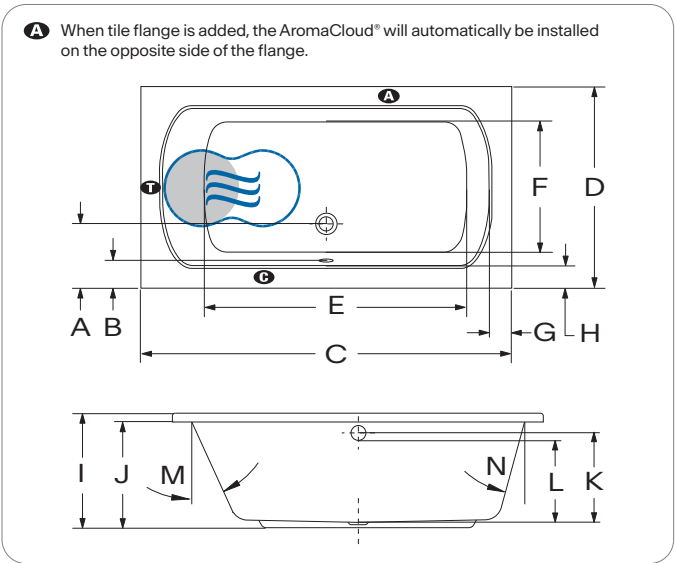

Letter	Description	Measure
A	Outside edge to center drain	11 3/8"
B	Outside edge to overflow	4 1/4"
C	Total length	65 1/2"
D	Total width	35 3/4"
E	Bathing well length	46 1/8"
F	Bathing well width	23 1/4"
G	Deck width at backrest end	4 3/8"
H	Deck width	4"
I	Height from bottom of bath to top deck	20 1/4"
J	Height from bottom of bath to bottom of deck	18 3/4"
K	Height from bottom of drain to center of overflow	16 1/8"
L	Maximum water level (Drain & overflow 16" x 35")	14 3/8"
M	Slope of backrest	24°
N	Slope of backrest	15°

A AromaCloud® position. When the tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.
G Control position when factory-installed (Mia® or DOT) **T** Turbine position (TMU)
● Indicates heated backrest (TMU) ☐ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Optional tile flange (specify front or back). When ordered with a factory-installed tile flange, the control will not be installed on the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000095
Approx. shipping weight	127 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.