

meridian ellipse 7240

72" x 40" x 21"



Product No.

Model	Rolled deck	TMU	BMEUOUMOT-XX	Soaker	BMEUOUMON-XX
Model	Flat deck	TMU	BMEUOUNOT-XX	Soaker	BMEUOUNON-XX

ThermoMasseur (TMU)

Air Jet System	\$6,420
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd WarmTouchShell® <i>BWTS2</i>	\$1,125

Soaker

	\$2,970
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$370

Features

Installation Type	Drop-in & Undermount
No. of bathers Imp. gallons 49 US gallons 59	
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Bath Pillow <i>BPILLOW</i>	\$240
Comfort Cushion <i>BCUSHIONA</i>	\$540
☐ Grey 05 ☒ Black 02	
Drain & Overflow	16" x 35" <i>BOVER16-XX</i>
☐ Chrome 07	\$260
☐ White 01 ☐ Biscuit 02	\$290
☐ Brushed Nickel 09	\$290
☐ Polished Nickel 10	\$290
☐ Oil-rubbed Bronze 11	\$400
☒ Matte Black 19 ☐ Satin Brass 18	N/A
If Required by Construction Code	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$240

Don't forget to indicate flat or rolled deck.

For Undermount installation specify a flat deck only.

** The AromaCloud® is built into the deck (factory installed).
Not available for Undermount installation.

https://bainultra.com/sites/default/files/product_files/product-sheet-meridian-ellipse-7240.pdf

meridian ellipse 7240

72" x 40" x 21"




Flat deck



Rolled deck



Technical Specifications

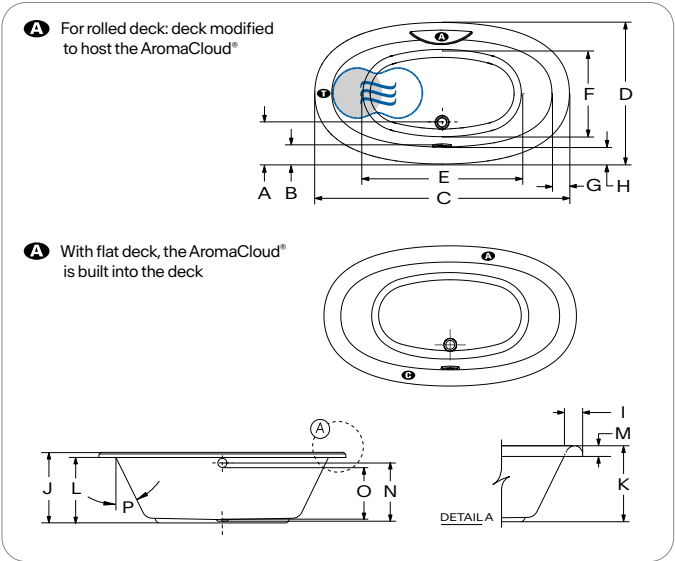

Letter	Description	Measure
A	Outside edge to center drain	11 3/4"
B	Outside edge to overflow	4 7/8"
C	Total length	72"
D	Total width	40"
E	Bathing well length	46 1/8"
F	Bathing well width	24 3/4"
G	Deck width at backrest end	4 3/4"
H	Deck width	4 5/8"
I	Rolled deck width	5 3/8"
J	Height from bottom of bath to top deck	21"
K	Height from bottom of bath to top deck	22"
L	Height from bottom of bath to bottom of deck	19 1/2"
M	Height from bottom of deck to top deck	2 1/2"
N	Height from bottom of drain to center of overflow	16 5/8"
O	Maximum water level (Drain & overflow 16" x 35")	14 7/8"
P	Slope of backrest	27°

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
C Turbine position (TMU) **D** Indicates heated backrest (TMU)
E Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the rolled deck (see drawing Detail A). Available with flat deck or rolled deck.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000105
Approx. shipping weight	128 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.