

charism 7240

Freestanding
72" x 40" x 24"

Product No.

Model Freestanding TMU Bchuofoot-XX Soaker Bchuofoon-XX

ThermoMasseur (TMU)

Air Jet System	\$11,495
Jets	41
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

\$8,970
Illuzio Chromatherapy BCHRO6
WarmTouchShell® BWTS
DOT Control
2nd WarmTouchShell® BWTS2

Features

Installation Type	Freestanding
No. of bathers	Imp. gallons 57 US gallons 68
Integrated Drain & Overflow — ZenFlow® BOVERINIZF-01	
<input type="checkbox"/> White 01	Installed & Included
Standard Bath Color p.17	
<input type="checkbox"/> White 01	Included
Standard Deck Color BDECKCO-XX p.17	
<input type="checkbox"/> White 01	Included

Options UPCHARGE APPLICABLE

Finish p.17		
<input type="checkbox"/> UltraVelour Matte Finish (white only) BVEL3	\$1,025	
Deck Color BDECKCO-XX p.17		
<input checked="" type="checkbox"/> Black 06 <input type="checkbox"/> Copper 13 <input type="checkbox"/> Crystal Rock 17		
<input type="checkbox"/> White 01	\$895	
Bath Pillow BPILLOW p.252	\$240	
Drain & Overflow p.14		
<input type="checkbox"/> White 01	Integrated ZenFlow® BOVERINZF-XX	Integrated with trim BOVERIN-XX
<input type="checkbox"/> Matte White 32 <input type="checkbox"/> Chrome 07	Incl.	\$40
<input type="checkbox"/> Brushed Nickel 09 <input type="checkbox"/> Polished Nickel 10	\$40	\$70
<input checked="" type="checkbox"/> Matte Black 19 <input type="checkbox"/> Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15		
Island Tub Drain™ BISLDD	\$260	
Cast Iron Island Tub Drain™ ISLDDCI	\$310	
If Required by Construction Code		
Brass drain & overflow kit BDRCOB	\$240	
Brass drain kit BDRCB	\$60	

● Turbine must be remotely installed. With the AromaCloud® and/or Control on the deck, a complete shower door cannot be installed.

Faucets must be wall-mounted. Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.


* For TMU, control and faucets cannot be installed on deck of the bath.

*** An Island Tub Drain™ is required when there is no access under the bath.




charism 7240

Freestanding
72" x 40" x 24"

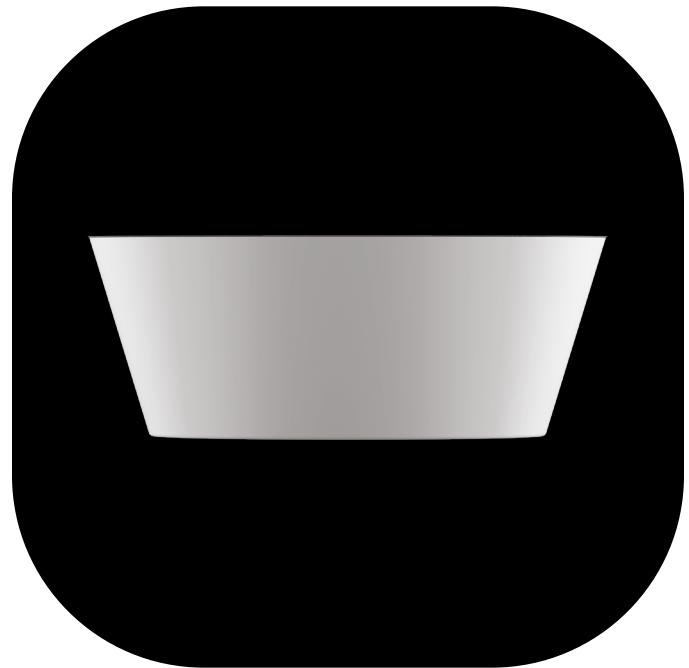

Technical Specifications

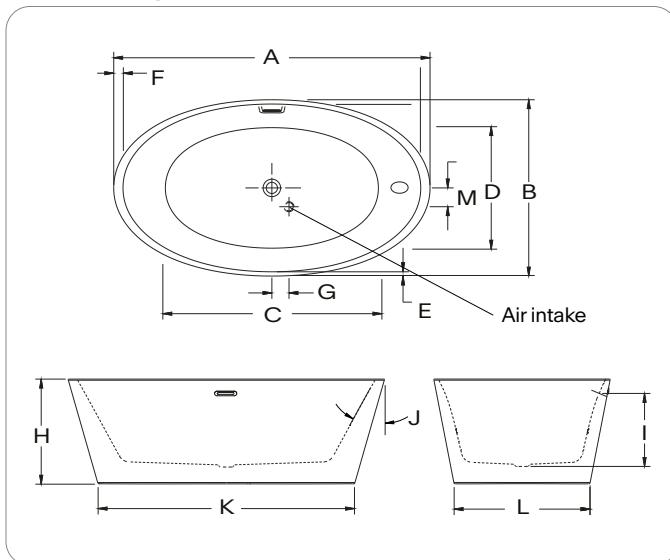

Letter	Description	Measure
A	Total length	71 1/2"
B	Total width	39 7/8"
C	Bathing well length	49 1/2"
D	Bathing well width	27 5/8"
E	Deck width	1 1/16"
F	Deck width at headrest	2 1/8"
G	Center drain to center air intake	3 7/8"
H	Total height	24 3/4"
I	Maximum water level	15 7/8"
J	Slope of backrest	29°
K	Base length	58"
L	Base width	30 5/8"
M	Center drain to center air intake	4 1/4"

● Indicates heated backrest (TMU) (S) Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000075
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: $\pm 0.25" (\pm 0.64 \text{ cm})$. Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.