### **Product Sheet**

# libra 7436

# Freestanding $74" \times 36" \times 23"$



# **Product No.**

Model Freestanding	TMU BLITRFOOT-XX	Soaker BLITRFOON-XX

ThermoMasseur	(TMU)
A local and One set and a	

Thermolviasseur (TiviO)	010 E 4 E	
Air Jet System	\$10,545	
Jets	46	
1 heated backrest	Included	
MiaPlus® Control <sup>+++</sup>	Included	
BU-Touch Control Application	Included	
Geysair®	Included	
AromaFlow*** BAROMAF	\$950	
Illuzio Chromatherapy BCHRO6	\$995	
2nd heated backrest (WTS-1 zone) BSHB	\$1,125	

Soaker	\$8,095
AromaFlow*** BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

#### **Options** UPCHARGE APPLICABLE

Bath Color p.17		
Black / White 66	\$475	
Finish p.17		
UltraVelour Matte Finish (white only) BVEL3	\$1,025	
Universal Armrests BGBGU-XX p.16		
White 01	\$895	
Bath Pillow BPILLOW p.252	\$240	
Drain & Overflow p.14	Integrated ZenFlow⁺ <i>BOVERINZF-XX</i>	Integrated with trim BOVERIN-XX
Chrome 07	\$40	\$70
White 01	Incl.	\$40
Brushed Nickel 09 Polished Nickel 10	\$40	\$70
🜑 Matte Black 19 🛛 🔲 Satin Brass 18	\$95	\$125
Matte White 32	\$40	\$70
Island Tub Drain™*** p.15		
Island Tub Drain™ BISLDD	\$260	
Cast Iron Island Tub Drain™ BISLDDCI	\$310	
If Required by Construction Code or installed with ITD		
Brass drain & overflow kit BDRCOB	\$240	
Brass drain kit BDRCB	\$60	

#### **Features**

Installation Type	Freestanding
No. of bathers 👬 Imp. gallons 67 US gallons 81	
Integrated Drain & Overflow – ZenFlow <sup>†</sup> BOVERINIZF-01	
White 01	Installed & Included
Standard Bath Color p.17	
White 01	Included

<sup>+++</sup> Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
\*\*\* An Island Tub Drain™ is recommended when there is no access under the bath.



https://bainultra.com/sites/default/ files/product\_files/product-sheet-libra-7436.pdf

For the installer Scan to view installation video (3:20 min) →



#### **Product Sheet**


# libra 7436







### **Technical Specifications**

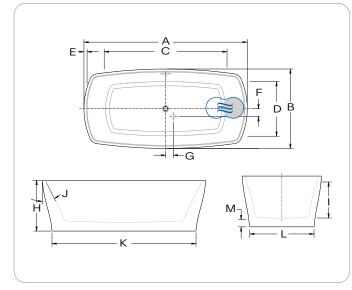

Letter	Description	Measure
A	Total length	74"
В	Total width	36"
С	Bathing well length	55 5/8"
D	Bathing well width	24 3⁄4"
E	Deck width	1 3⁄8"
F	Center drain to air intake (side)	3 1/2"
G	Center drain to air intake (front)	3 1/2"
н	Total height	23"
I	Maximum water level Maximum water level with AromaFlow	16 ¾" 14 ¾"
J	Slope of backrests	26°
К	Base length	65 1⁄4"
L	Base width	29 1/4"
М	Height from drain to floor	3 1⁄4"

Indicates heated backrest (TMU) (Indicates WarmTouchShell<sup>®</sup> position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.	
Turbine	Turbine is remotely installed; access to to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated It must be connected to the hot water supply and be accessible (provide access).	
	Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000091
Approx. shipping weight	240 lb
Turbine power	550 W
Air heater	600 W

## Warranty

•	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance:  $\pm 0.25$ " ( $\pm 0.64$  cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.