

amma 6636

66" x 36" x 21"



Product No.

Model	TMU BAMLRB00T-XX	Soaker BAMLRB00N-XX
-------	------------------	---------------------

ThermoMasseur (TMU)

Air Jet System	\$8,065
Jets	49
1 heated backrest & headrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045

Soaker

AromaCloud®** <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers 1 Imp. gallons 47 US gallons 56 Raised seat 1	
Inverted V 1 Armrests 2 Grab bars (Color match) 2	
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Skirt	BSMUL-XX	Multifit BSJI-XX	SJ-1
☐ White 01 ☐ Biscuit 02		\$730	\$750
Clear Acrylic Grab Bars <i>BGBG10-XX</i>			
☐ Chrome 07 ☐ Brushed Nickel 09 inserts		\$65	
Tile Flange (specify right or left)			
Ordered with bath (not installed) <i>BTILEN</i>		\$85	
Factory-installed. Right <i>BTILER</i> , Left <i>BTILEL</i> , Special installation <i>BTILEO</i>		\$165	
Bath Pillow <i>BPILLOW</i>		\$250	
Drain & Overflow	Integrated ZenFlow† <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>	16" x 35" <i>BOVER16-XX</i>
☐ Chrome 07	\$215	\$245	\$275
☐ White 01 ☐ Biscuit 02	\$175	\$215	\$305
☐ Brushed Nickel 09	\$215	\$245	\$420
☐ Polished Nickel 10	\$215	\$245	\$420
☐ Oil-rubbed Bronze 11	N/A	N/A	\$420
☐ Matte Black 19 ☐ Satin Brass 18	\$275	\$305	N/A
If Required by Construction Code			
Brass drain & overflow kit† <i>BDRCOB</i>		\$250	
Brass drain kit† <i>BDRCB</i>		\$65	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>		\$250	

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
‡ When ordered with Integrated drain & overflow.

amma 6636

66" x 36" x 21"




Grab bar (included)



Molded heated headrest

Technical Specifications

A When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

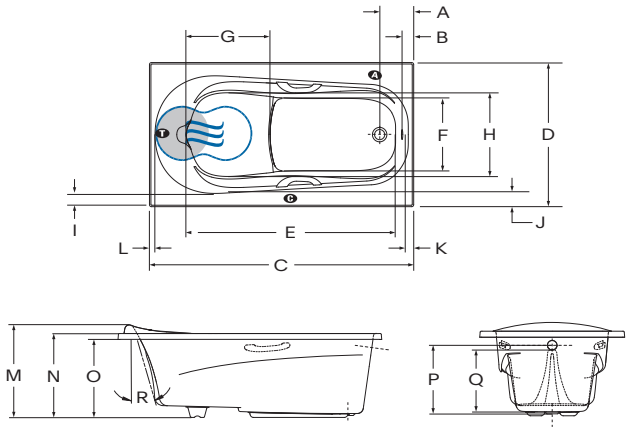

Letter	Description	Measure
A	Outside edge to center drain	8 ½"
B	Outside edge to overflow	2 ½"
C	Total length	66"
D	Total width	36"
E	Bathing well length	52 ¼"
F	Bathing well width at center zone	18"
G	Raised seat length	21"
H	Raised seat width	20 ⅞"
I	Deck width (narrowest point)	3"
J	Deck width (widest point)	4 ⅞"
K	Deck width at drain end	2 ⅞"
L	Deck width at backrest end	1 ⅞"
M	Total height to headrest	23 ⅞"
N	Height from bottom of bath to top deck	21"
O	Height from bottom of bath to bottom of deck	19 ½"
P	Height from bottom of drain to center of overflow	17 ⅞"
Q	Maximum water level (Drain & overflow 16" x 35")	15 ⅜"
	Maximum water level (Integrated drain & overflow)	16 ⅜"
R	Slope of backrest	18°

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **●** Indicates heated backrest (TMU)
☺ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
Optional Tile Flange (specify right or left).	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	145 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.