

inua 7240

72" x 40" x 23"



Standard 1½" deck

Product No.

Model	Standard 1½" deck	TMU	BINURD00T-XX	Soaker	BINURDOON-XX
Model	Slim deck ½"	TMU	BINURD10T-XX	Soaker	BINURD10N-XX

ThermoMasseur (TMU)

Air Jet System	\$8,925
Jets	58
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud® <i>BAROMAC</i>	\$620
AromaFlow ^{††} <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,180

Soaker

AromaCloud® <i>BAROMAC</i>	\$620
AromaFlow ^{††} <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$390

Features

Installation Type	Drop-in
No. of bathers	2
Imp. gallons	56
US gallons	67
Raised seats	2
Inverted V	2
Armrests	4
Grab bars (Color match)	2
Comfort Cushion (Specify color: Grey or Black)	2 Included
Standard Bath Color	
White 01	Included
Biscuit 02	

Options UPCHARGE APPLICABLE

Finish			
 UltraVelour Matte Finish (white only) <i>BVEL1</i>		\$685	
Clear Acrylic Grab Bars <i>BGBG10-XX</i>			
 Chrome 07	 Brushed Nickel 09 inserts	\$65	
Bath Pillow <i>BPILLOW</i>		\$250	
Drain & Overflow		Integrated ZenFlow [†] <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Chrome 07		\$215	\$245
 White 01	 Biscuit 02	\$175	\$215
 Brushed Nickel 09		\$215	\$245
 Polished Nickel 10		\$215	\$245
 Oil-rubbed Bronze 11		N/A	N/A
 Matte Black 19	 Satin Brass 18	\$275	\$305
 Matte White 32		\$215	\$245
If Required by Construction Code			
Brass drain & overflow kit [†] <i>BDRCOB</i>		\$250	
Brass drain kit [†] <i>BDRCB</i>		\$65	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>		\$250	


⚠ Don't forget to specify the deck height (½" or 1½").

Faucets should be installed on the most level portion of the deck surface.

[†] ZenFlow: Integrated overflow without a trim.
^{††} When ordering an AromaFlow, an Integrated drain & overflow is mandatory (Upcharge). Specify the finish of the drain. With the AromaFlow, the included Grab Bars can not be installed.
[‡] When ordered with Integrated drain & overflow.


inua 7240

72" x 40" x 23"

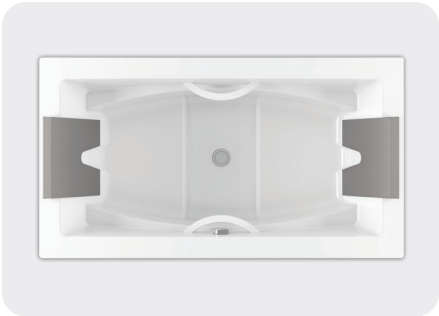

Comfort Cushion (2 included)

Technical Specifications

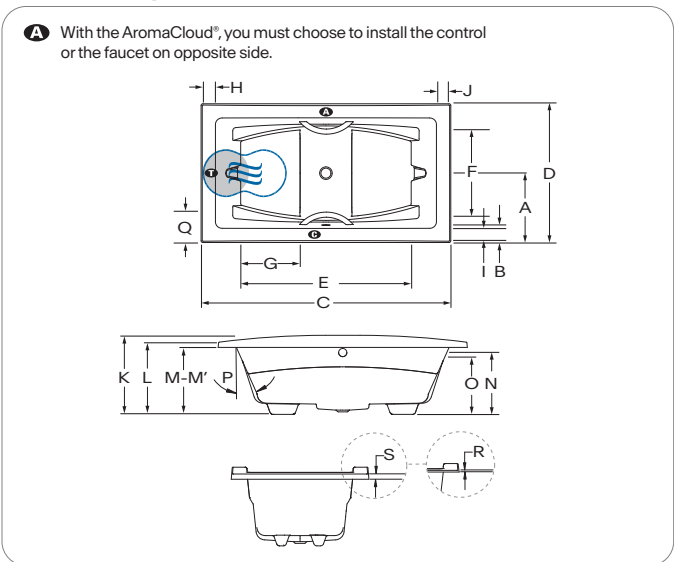

- A** AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
T Turbine position (TMU) **H** Indicates heated backrest (TMU)
S Indicates WarmTouchShell® position (Soaker)

Letter	Description	Measure
A	Outside edge to center drain	20"
B	Outside edge to overflow	4 1/2"
C	Total length	72"
D	Total width	40"
E	Bathing well length	49 1/8"
F	Bathing well width at center zone	25 1/8"
G	Raised seat length	17 1/8"
H	Deck width at backrest end	4 5/8"
I	Deck width	4 5/8"
J	Deck width	4 5/8"
K	Height from bottom of bath to top deck	23"
L	Total height to headrest	21"
M	Height from bottom of bath to bottom of standard deck	19 1/2"
M'	Height from bottom of bath to bottom of slim deck	20 1/2"
N	Height from bottom of drain to center of overflow	17 1/8"
O	Maximum water level (Drain & overflow 16" x 35")	15 3/8"
	Maximum water level (Integrated drain & overflow)	16 3/8"
	Maximum water level with AromaFlow	15 15/16"
P	Slope of backrests	24°
Q	Minimum spout reach	8 3/4"
R	Slim deck minimum height	1/2"
S	Standard deck minimum height	1 1/2"

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Therapeutic Comfort Cushion - 2 INCLUDED	Made of ultraresistant urethane gel. Extremely comfortable and soft to the touch. Fully waterproof. Remarkably durable. Color available: Grey or Black.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	The water level may vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.

Approx. shipping weight	153 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty