


origami 6636

66" x 36" x 22"

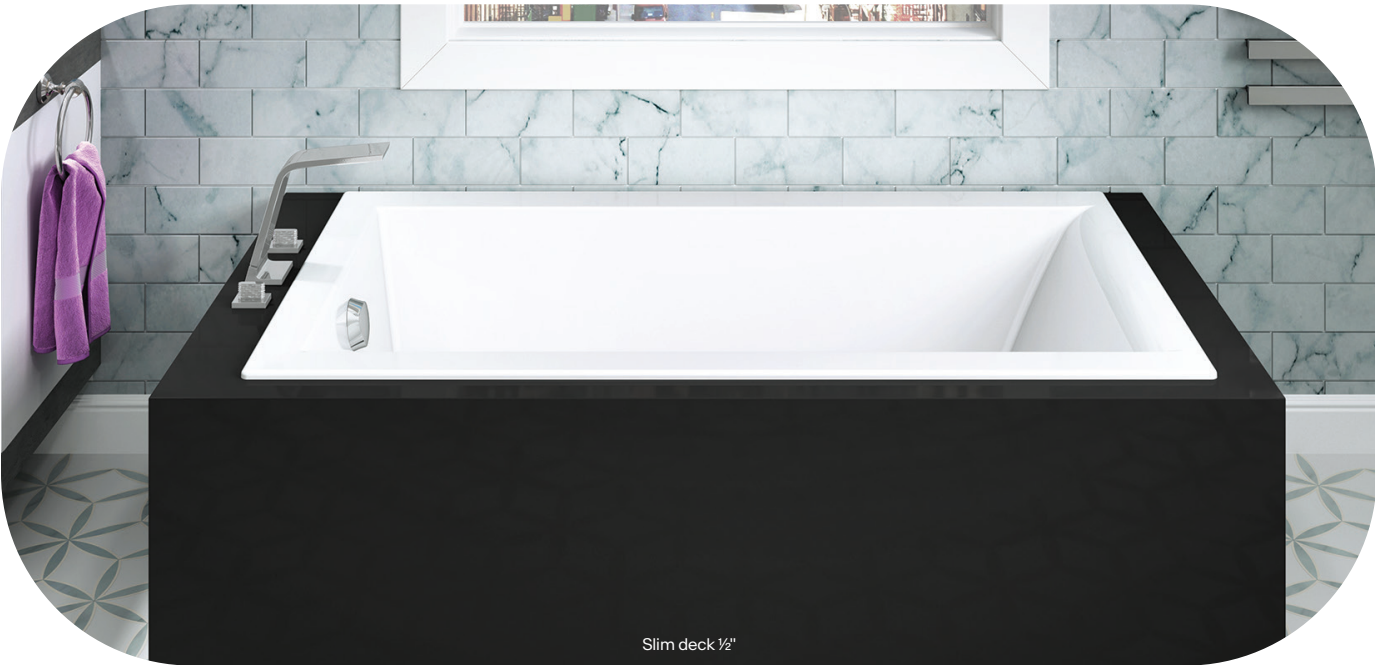

Slim deck 1/2"

Product No.

Model 4" deck	TMU BOOLRI00T-XX	Soaker BOOLRI00N-XX
Model 2" deck	TMU BOOLRI20T-XX	Soaker BOOLRI20N-XX
Model Slim deck 1/2"	TMU BOOLRI10T-XX	Soaker BOOLRI10N-XX

ThermoMasseur (TMU)

Air Jet System	\$6,745
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
AromaCloud®** BAROMAC	\$620
AromaFlow†† BAROMAF	\$1,000
Illuzio Chromatherapy BCHRO6	\$1,045

Soaker

AromaCloud®** BAROMAC	\$620
AromaFlow†† BAROMAF	\$1,000
Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in: 1/2", 2" & 4", Alcove (3 walls): 2" & Undermount: 1/2"
No. of bathers	2
Imp. gallons	52
US gallons	62
Standard Bath Color	
White 01	Included
Biscuit 02	

Options UPCHARGE APPLICABLE


Finish			
UltraVelour Matte Finish (white only) BVEL1			\$685
Universal Armrests BGBGU-XX			
White 01			\$940
Skirt (2" deck only)	Multifit BSMUL-XX	SJ-1 BSJI-XX	
White 01	Biscuit 02		\$730 \$750
Tile Flange (with 2" deck only) (specify right or left)			
Ordered with bath (not installed) BTILEN			\$85
Factory-installed. Right BTILER, Left BTILEL, Special installation BTILEO			\$165
Bath Pillow BPILLOW			\$250
Drain & Overflow	Integrated ZenFlow† BOVERINZF-XX	Integrated with trim BOVERIN-XX	16" x 35" BOVER16-XX
Chrome 07	\$215	\$245	\$275
White 01	Biscuit 02	\$175	\$215 \$305
Brushed Nickel 09	\$215	\$245	\$420
Polished Nickel 10	\$215	\$245	\$420
Oil-rubbed Bronze 11	N/A	N/A	\$420
Matte Black 19	Satin Brass 18	\$275	\$305 N/A
Matte White 32	\$215	\$245	N/A
If Required by Construction Code			
Brass drain & overflow kit† BDRCOB			\$250
Brass drain kit† BDRCB			\$65
16" x 35" Cable driven brass drain & overflow kit BOVERBR			\$250

Don't forget to indicate the deck height (1/2", 2" or 3 1/4"). 1/2" slim deck is available for drop-in and undermount installation only.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed). Not available for undermount installation.
† When ordered with Integrated drain & overflow.
†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge). Specify the finish of the drain.


origami 6636

66" x 36" x 22"

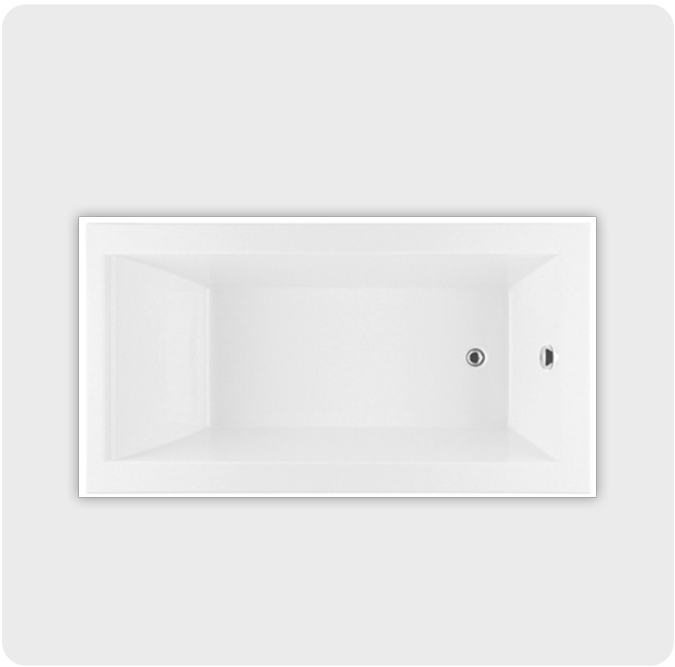

Technical Specifications

A When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

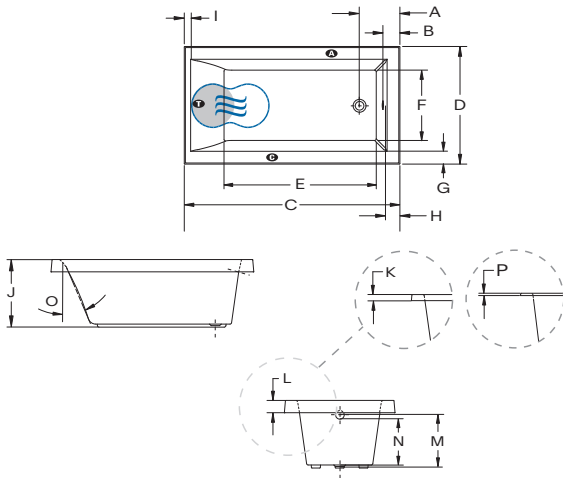

Letter	Description	Measure
A	Outside edge to center drain	12 3/8"
B	Outside edge to overflow	4 5/8"
C	Total length (with 1/2" deck height)	65 5/8"
	Total length (with 2" deck height)	65 7/8"
	Total length (with 4" deck height)	66 1/4"
D	Total width (with 1/2" deck height)	35 1/2"
	Total width (with 2" deck height)	35 3/4"
	Total width (with 4" deck height)	36 1/8"
E	Bathing well length	47 1/4"
F	Bathing well width	22 1/4"
G	Deck width	4 1/2"
H	Deck width at drain end	4 1/2"
I	Deck width at backrest	1 5/8"
J	Height from bottom of bath to top deck	21 7/8"
K	Height from bottom of deck to top deck	2"
L	Height from bottom of deck to top deck	4"
M	Height from bottom of drain to center of overflow	17 1/4"
N	Maximum water level (Drain & overflow 16" x 35")	15 1/2"
	Maximum water level (Integrated drain & overflow)	17"
	Maximum water level with AromaFlow	16 1/2"
O	Slope of backrest	24°
P	Height from bottom of deck to top deck	1/2"

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **J** Indicates heated backrest (TMU)
K Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Optional Tile Flange (specify right or left). The water level will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000100
Approx. shipping weight	135 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.