

origami 7242

72" × 42" × 22"



Product No.

Model 5" deck	TMU BOOVRI00T-XX	Soaker BOOVRI00N-XX
Model 2" deck	TMU BOOVRI20T-XX	Soaker BOOVRI20N-XX
Model Slim deck ½"	TMU BOOVRI10T-XX	Soaker BOOVRI10N-XX

ThermoMasseur (TMU)

Air Jet System	\$7,460
Jets	44
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow†† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,180

Soaker

AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow†† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$390

Features

Installation Type	Drop-in: ½", 2" & 5", Alcove (3 walls): 2" & Undermount: ½"
No. of bathers 🧑🧑	Imp. gallons 60 US gallons 72
Standard Bath Color	
☐ White 01 ☐ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
UltraVelour Matte Finish (white only) <i>BVEL1</i>			\$685
Universal Armrests <i>BGBGU-XX</i>			
☐ White 01			\$940
Skirt (2" deck only)	Multifit <i>BSMUL-XX</i>	SJ-1 <i>BSJ1-XX</i>	
☐ White 01 ☐ Biscuit 02			\$730 \$750
Tile Flange (with 2" deck only) (specify front or back)			
Ordered with bath (not installed) <i>BTILEN</i>			\$85
Factory-installed. Front <i>BTILEF</i> , Back <i>BTILEB</i> , Special installation <i>BTILEO</i>			\$165
Bath Pillow <i>BPILOW</i>			\$240
Drain & Overflow	Integrated ZenFlow† <i>BOVERINF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>	16" x 35" <i>BOVER16-XX</i>
☐ Chrome 07	\$215	\$245	\$275
☐ White 01 ☐ Biscuit 02	\$175	\$215	\$305
☐ Brushed Nickel 09	\$215	\$245	\$420
☐ Polished Nickel 10	\$215	\$245	\$420
☐ Oil-rubbed Bronze 11	N/A	N/A	\$420
☐ Matte Black 19 ☐ Satin Brass 18	\$275	\$305	N/A
☐ Matte White 32	\$215	\$245	N/A
If Required by Construction Code			
Brass drain & overflow kit† <i>BDRCOB</i>			\$250
Brass drain kit† <i>BDRCB</i>			\$65
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>			\$250

⚠ Don't forget to indicate the deck height (½", 2" or 5").

½" slim deck is available for Drop-in and Undermount installation only.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed). Not available for Undermount installation.
† When ordered with Integrated drain & overflow.
†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge). Specify the finish of the drain.


origami 7242

72" × 42" × 22"



Technical Specifications

A When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

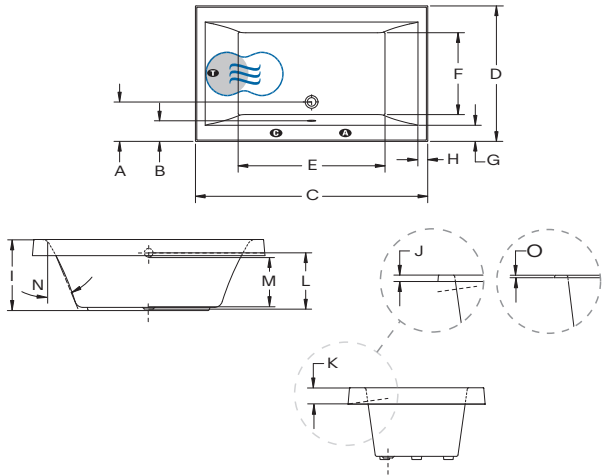

Letter	Description	Measure
A	Outside edge to center drain	12 ¼"
B	Outside edge to overflow	5 ⅜"
C	Total length (with 1/2" deck height) Total length (with 2" deck height) Total length (with 5" deck height)	71 ¼" 71 ⅝" 72 ⅞"
D	Total width (with 1/2" deck height) Total width (with 2" deck height) Total width (with 5" deck height)	41 ¼" 41 ⅝" 42 ⅞"
E	Bathing well length	45"
F	Bathing well width	26 ¼"
G	Deck width	5 ⅜"
H	Deck width at backrest ends	3"
I	Height from bottom of bath to top deck	22"
J	Height from bottom of deck to top deck	2"
K	Height from bottom of deck to top deck	5"
L	Height from bottom of drain to center of overflow	17 ⅞"
M	Maximum water level (Drain & overflow 16" x 35") Maximum water level (Integrated drain & overflow) Maximum water level with AromaFlow	16" 16 ¾" 16 ¼"
N	Slope of backrests	24°
O	Height from bottom of deck to top deck	½"

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **J** Indicates heated backrest (TMU)
K Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Optional tile flange with 2" deck height only (specify front or back). The water level will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000102
Approx. shipping weight	140 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.