



PRODUCT SHEET

AMMA 7048

70" X 48" X 21"



THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	79
2 heated backrests (Independently controlled)	included
2 heated headrests (Independently controlled)	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Illuzio Chromatherapy NEW	\$

TUB (soaker)	
AromaCloud®	\$
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy
2 nd WarmTouchShell®	\$

FEATURES			
Installation types	Drop-in & Alcove		
No. of bathers		Inverted V	2
US gallons	75	Armrests	2
Imp. gallons	62	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARGE APPLICABLE		
COLOR		
Standard		
White	Biscuit	
Optional		
		\$
Gray		
CONTROL (TMU ONLY)		
MiaMulti®		\$
SKIRT		
	MULTIFIT	SJ-1
Skirt	\$	\$
Optional color	\$	\$
CLEAR ACRYLIC GRAB BARS		
With Chrome, Brass or Brushed nickel inserts		\$
WASTE & OVERFLOW		
	16" X 35"	INTEGRATED WASTE & OVERFLOW
Chrome	\$	\$
White, Biscuit	\$	\$
Brass	\$	\$
Brushed nickel, Polished nickel	\$	\$
Oil-rubbed bronze	\$	N/A
TILE FLANGE (specify right or left)		
Ordered with bath, uninstalled		\$
Factory-installed		\$

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

AMMA 7048 70" X 48" X 21"

ACCESSORIES (OPTIONAL)


OTHER

Optional tile flange (specify right or left).


TOTAL PRICE

\$


DROP-IN INSTALLATION

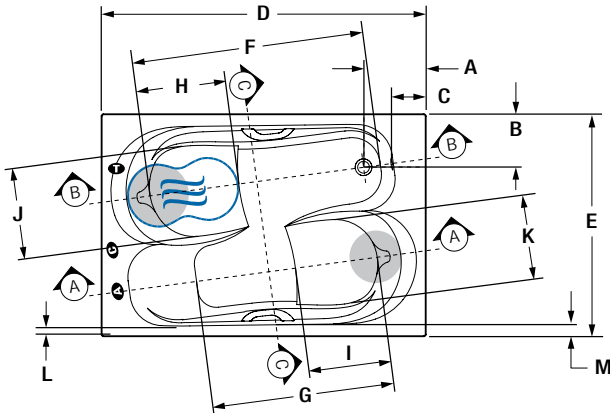


Section B

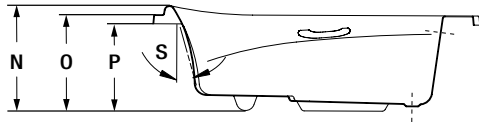

Section A



Section C



LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	13 1/2"
B	Outside edge to center drain	11 1/2"
C	Outside edge to overflow	7 3/8"
D	Total length	69 3/4"
E	Total width	48 1/8"
F	Bathing well length	50 3/4"
G	Bathing well length	40 7/8"
H	Raised seat length	19 1/4"
I	Raised seat length	17 7/8"
J	Raised seat width	19 1/2"
K	Raised seat width	18 1/2"
L	Deck width (narrowest point)	1 7/8"
M	Deck width (widest point)	2 7/8"
N	Total height to headrest	22 1/2"
O	Height from bottom of tub to top deck	20 1/2"
P	Height from bottom of tub to bottom of lip	17 1/2"
Q	Height from drain to center of overflow	16 3/8"
R	Maximum water level	14 3/4"
S	Slope of backrest	16°
T	Slope of backrest	16°
U	Slope of backrest	41°

A AromaCloud position

● Heated backrest (TMU)

C Control position when factory-installed (Mia or Dot)

☄ WarmTouchShell position

T Turbine position (TMU)

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz,** dedicated line with a Ground-Fault Circuit Interrupter (GFCI). **For any additional option, a second line is needed 15 A, 120 V, 60 hz,** dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight 215 lbs

Turbine power 550 W

Air heater 600 W

WARRANTY

Controls-LED-Geysair* 5 years

Bath & turbine* 20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.