

bain de ville 6632

66" x 32" x 20"



Product No.

Model Alcove, Left	TMU BBVIRAOLT-XX	Soaker BBVIRAOLN-XX
Model Alcove, Right	TMU BBVIRAORT-XX	Soaker BBVIRAORN-XX

ThermoMasseur (TMU)

Air Jet System	\$5,340
Jets	44
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045

Soaker

AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Alcove (3 walls)
Integrated Skirt & Tile Flange (specify right or left)	Installed & Included
No. of bathers ½ Imp. gallons 52 US gallons 62	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-XX</i>	
○ White 01 ○ Biscuit 02	Installed & Included
Standard Bath Color	
○ White 01 ○ Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
○ UltraVelour Matte Finish (white only) <i>BVEL1</i>			\$685
Control (TMU only)			
MiaPlus®# <i>BMIAP1-XX</i>			\$300
Universal Armrests <i>BGBGU-XX</i>			
○ White 01			\$940
Bath Pillow <i>BPILLOW</i>			\$250
Comfort Cushion <i>BCUSHIONA</i>			\$565
● Grey 05 ● Black 06			
Drain & Overflow			
● Chrome 07		Integrated ZenFlow† <i>BOVERINIZF-XX</i>	\$40
○ White 01 ○ Biscuit 02		Integrated with trim <i>BOVERIN-XX</i>	\$75
● Brushed Nickel 09			\$100
● Polished Nickel 10			\$40
● Oil-rubbed Bronze 11			\$75
● Matte Black 19 ● Satin Brass 18			\$245
○ Matte White 32			\$40
			\$75
			\$245
			\$100
			\$130
			\$245
			\$245
			\$245
			\$130
			N/A
			N/A
If Required by Construction Code			
Brass drain & overflow kit† <i>BDRCOB</i>			\$250
Brass drain kit† <i>BDRCB</i>			\$65
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>			\$250

⚠ With the AromaCloud® and/or Control on the deck, a complete shower door cannot be installed. Don't forget to specify the finish of the Integrated drain & overflow.


† ZenFlow: Integrated overflow without a trim.
The MiaPlus® Control is included when purchasing Chromatherapy on a TMU.
‡ When ordered with Integrated drain & overflow.

bain de ville 6632

66" x 32" x 20"



Technical Specifications

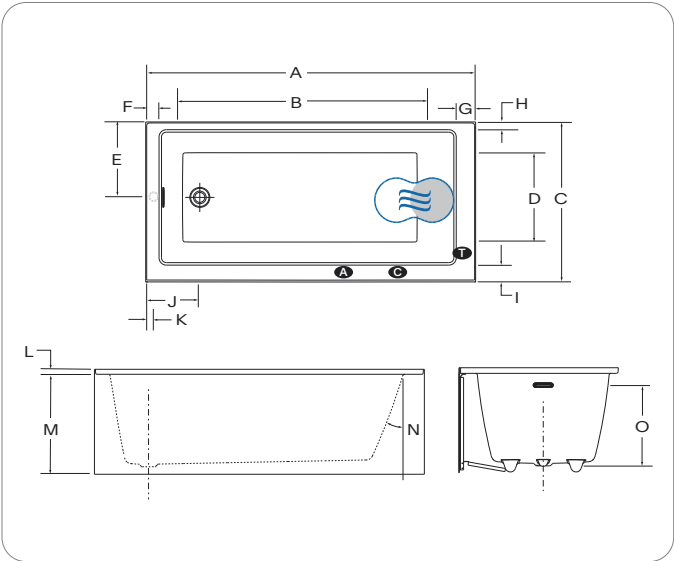

Letter	Description	Measure
A	Total length	66"
B	Bathing well length	50 5/8"
C	Total width	32"
D	Bathing well width	21 3/8"
E	Outer edge to center drain (right side)	15 1/8"
F	Deck width (drain side)	3 3/8"
G	Deck width (backrest)	4 3/8"
H	Deck width (wall side)	2"
I	Deck width (skirt side)	3 7/8"
J	Outer edge to center drain Integrated drain & overflow (front)	10 7/8"
K	Outer edge to center of overflow Drain & overflow 16" x 35" only	2 5/8"
L	Tile flange height	1"
M	Height from floor to bottom of deck	20"
N	Slope of backrest	21°
O	Maximum water level	16"

A AromaCloud® position **G** Control position when factory-installed (Mia® or DOT)
T Turbine position (TMU) **●** Indicates heated backrest (TMU)
S Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is factory installed, so access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Integrated tile flange is included (specify right or left).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	140 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.