

elegancia 6636

66" x 36" x 21"



Product No.

Model C10	TMU BELLRDA0T-XX	Soaker BELLRDA0N-XX
Model C11	TMU BELLODB0T-XX	Soaker BELLODB0N-XX

Model C13	TMU BELLODD0T-XX	Soaker BELLODD0N-XX
Model C14	TMU BELLODE0T-XX	Soaker BELLODE0N-XX

ThermoMasseur (TMU)

Air Jet System	\$6,645
Jets	36
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,180

Soaker

	\$3,290
AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$390

Features

Installation Type	Drop-in
No. of bathers Imp. gallons 38 US gallons 46 Armrests 4	
Grab bars (color match) 2	
Standard Bath Color	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

Options UPCHARGE APPLICABLE


Grab Bars	<i>BGBG10-XX</i>	Clear Acrylic ^{oo}
<input type="radio"/> Chrome 07		\$65
<input type="radio"/> Brushed Nickel 09		\$65
Bath Pillow <i>BPILLOW</i>		\$250
Comfort Cushion <i>BCUSHIONA</i>		\$565
<input type="radio"/> Grey 05 <input type="radio"/> Black 06		
Drain & Overflow	D13 <i>BOVERD13-XX</i>	D14 ^{†††} <i>BOVERD14-XX</i>
<input type="radio"/> Chrome 07	\$525	\$285
<input type="radio"/> White 01	N/A	\$285
<input type="radio"/> Biscuit 02	N/A	\$285
<input type="radio"/> Brushed Nickel 09	\$525	\$285
<input type="radio"/> Polished Nickel 10	\$525	\$285
<input type="radio"/> Oil-rubbed Bronze 11	\$525	N/A
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	N/A	N/A
<input type="radio"/> Unplated 00	\$525	N/A

Don't forget to select a contour among the 4 available to choose from.

[†] ZenFlow: Integrated overflow without a trim.
^{oo} Specify insert finish. With Chrome or Brushed Nickel inserts.
^{†††} Piping is not included for the drain & overflow D14.

elegancia 6636

66" x 36" x 21"

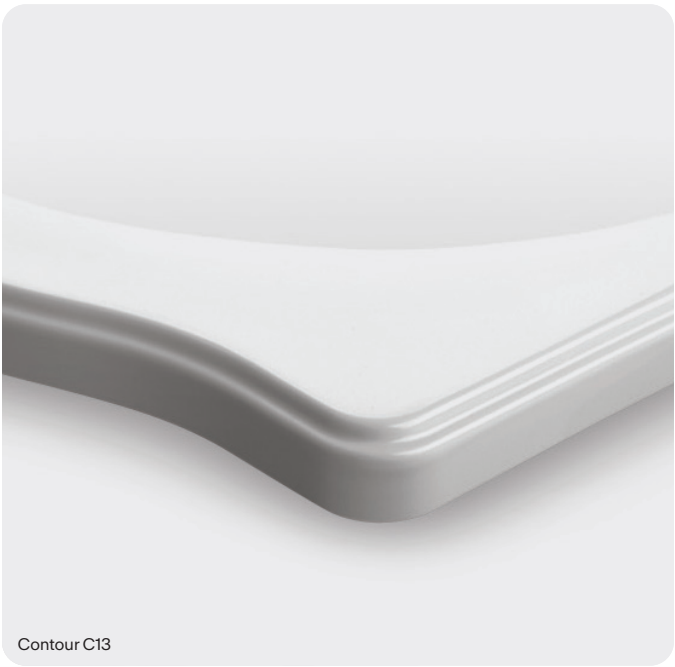


Contour C13




Contour C13

Technical Specifications

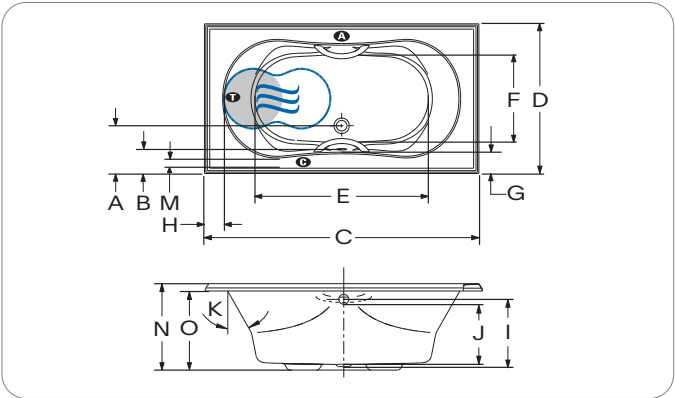

Letter	Description	Measure
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	5 1/2"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42"
F	Bathing well width	21 3/8"
G	Deck width (widest point)	5 1/4"
H	Deck width at backrest end	4 3/4"
I	Height from bottom of drain to center of overflow	16"
J	Maximum water level (Drain & overflow 16" x 35")	14 5/16"
K	Slope of backrests	30°
● AromaCloud® position ● Control position when factory-installed (Mia® or DOT)		
● Turbine position (TMU) ● Indicates heated backrest (TMU)		
Ⓢ Indicates WarmTouchShell® position (Soaker)		

Choose Your Contour

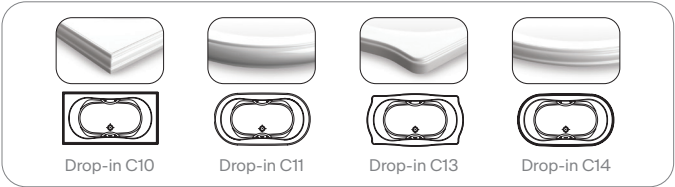

Letter	M	N	O
Description	Deck width (Narrowest point)	Height from bottom of bath to top deck	Height from bottom of bath to bottom of deck
C10	3 1/4"	20 3/4"	18 1/4"
C11	3 1/2"	20 5/8"	17 5/8"
C13	3 5/8"	20 5/8"	18 5/8"
C14	3 1/4"	20 3/4"	18 1/4"

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000044 (C11, C13 & C14)
Approx. shipping weight	135 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.