

esthesia 6638

66" x 38" x 21"



Product No.

| | | | | | |
|-------|------------------|-----|--------------|--------|--------------|
| Model | Standard 2" deck | TMU | BEAMRD00T-XX | Soaker | BEAMRD00N-XX |
| Model | Slim deck 1/2" | TMU | BEAMRD10T-XX | Soaker | BEAMRD10N-XX |

ThermoMasseur (TMU)

| | |
|----------------------------------------------|----------|
| Air Jet System | \$6,170 |
| Jets | 38 |
| 1 heated backrest | Included |
| MiaPlus® Control | Included |
| BU-Touch Control Application <i>BUTOUCH</i> | \$520 |
| Geysair® | Included |
| AromaCloud® <i>BAROMAC</i> | \$620 |
| Illuzio Chromatherapy <i>BCHRO6</i> | \$1,045 |
| 2nd heated backrest (WTS-1 zone) <i>BSHB</i> | \$1,180 |

Soaker

| | |
|-------------------------------------|-----------------------|
| AromaCloud® <i>BAROMAC</i> | \$620 |
| Illuzio Chromatherapy <i>BCHRO6</i> | \$1,045 |
| WarmTouchShell® <i>BWTS</i> | \$1,180 |
| DOT Control | Included with therapy |
| 2nd WarmTouchShell® <i>BWTS2</i> | \$390 |

Features

| | |
|-----------------------------------------------------------------|-------------------------------|
| Installation Type | Drop-in |
| No. of bathers 🧑🧑 | Imp. gallons 49 US gallons 59 |
| Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i> | |
| <input type="radio"/> White 01 | Installed & Included |
| Standard Bath Color | |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02 | Included |

Options UPCHARGE APPLICABLE

| | | |
|---------------------------------------------------------------------------|-------|-------|
| Finish | | |
| <input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL1</i> | | \$685 |
| Universal Armrests <i>BGBGU-XX</i> | | |
| <input type="radio"/> White 01 | | \$940 |
| Bath Pillow <i>BPILLOW</i> | | \$250 |
| Comfort Cushion <i>BCUSHIONA</i> | | \$565 |
| <input type="radio"/> Grey 05 <input type="radio"/> Black 06 | | |
| Drain & Overflow | | |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02 | Incl. | \$40 |
| <input type="radio"/> Chrome 07 | \$40 | \$75 |
| <input type="radio"/> Brushed Nickel 09 | \$40 | \$75 |
| <input type="radio"/> Polished Nickel 10 | \$40 | \$75 |
| <input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18 | \$100 | \$130 |
| If Required by Construction Code | | |
| Brass drain & overflow kit <i>BDRCOB</i> | | \$250 |
| Brass drain kit <i>BDRCB</i> | | \$65 |

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

Don't forget to specify the deck height (1/2" or 2").


† ZenFlow: Integrated overflow without a trim.

esthesia 6638

66" x 38" x 21"



Technical Specifications

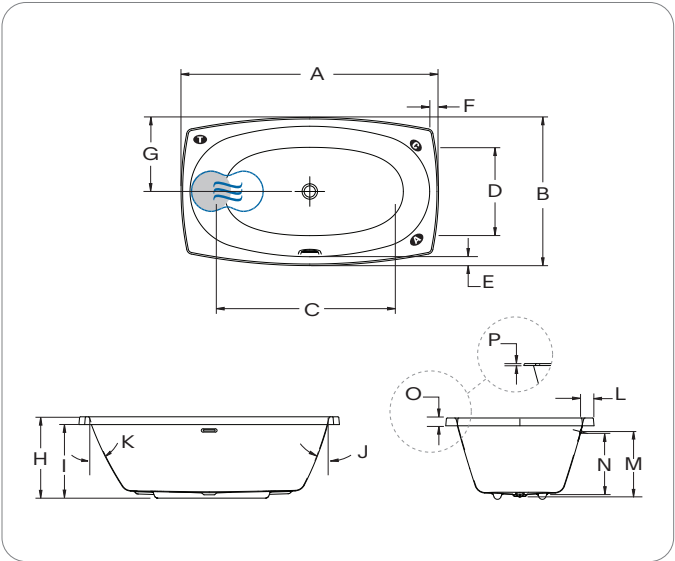

| Letter | Description | Measure |
|-----------------------------------------------------------------------------------|----------------------------------------------------------|---------|
| A | Total length | 66" |
| B | Total width | 38" |
| C | Bathing well length | 47 3/8" |
| D | Bathing well width | 23" |
| E | Deck width (narrowest point) | 2 5/8" |
| F | Deck width at 2nd backrest | 2 5/8" |
| G | Deck to drain center | 19" |
| H | Total height | 21" |
| I | Height from bottom of bath to bottom of standard deck 2" | 19" |
| J | Slope of 2nd backrest | 21° |
| K | Slope of backrest | 26° |
| L | Deck to edge of overflow | 3 1/2" |
| M | Height from bottom of drain to center of overflow | 16 5/8" |
| N | Maximum water level | 15 7/8" |
| O | Height from bottom to top of deck | 2" |
| P | Height from bottom to top of slim deck | 1/2" |
| A AromaCloud® position C Control position when factory-installed (Mia® or DOT) | | |
| I Turbine position (TMU) Indicates heated backrest (TMU) | | |
| Indicates WarmTouchShell® position (Soaker) | | |

| | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity. |
| Turbine | Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum. |
| Others | The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

| | |
|-------------------------|------------|
| Cutting template | # 90000066 |
| Approx. shipping weight | 120 lb |
| Turbine power | 550 W |
| Air heater | 600 W |

Warranty

| | |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.