

libra 6834

68" x 34" x 21"



Product No.

Model Drop-in, Std 1½" deck	TMU BLIYRU00T-XX	Soaker BLIYRU00N-XX
Model Slim deck ½"	TMU BLIYRU10T-XX	Soaker BLIYRU10N-XX

ThermoMasseur (TMU)

Air Jet System	\$5,810
Jets	42
1 heated backrest	Included
2nd heated backrest (WTS-1 zone) BSHB	\$1,180
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
AromaFlow* BAROMAF	\$1,000
Illuzio Chromatherapy BCHRO6	\$1,045

Soaker

AromaFlow* BAROMAF	\$1,000
Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
2nd WarmTouchShell® BWTS	\$390
DOT Control	Included with therapy

Features

Installation Type	Drop-in & Undermount
No. of bathers 2 Imp. gallons 51 US gallons 61	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-XX	
White 01 Biscuit 02	Installed & Included
Standard Bath Color	
White 01 Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish	
UltraVelour Matte Finish (white only) BVEL1	\$685
Universal Armrests BGBGU-XX	
White 01	\$940
Bath Pillow BPILLOW	\$250
Drain & Overflow	Integrated ZenFlow† BOVERINZF-XX Integrated with trim BOVERIN-XX
White 01 Biscuit 02	Incl. \$40
Matte White 32 Chrome 07	\$40 \$75
Brushed Nickel 09 Polished Nickel 10	
Matte Black 19 Satin Brass 18	\$100 \$130
If Required by Construction Code or installed with ITD	
Brass drain & overflow kit BDRCOB	\$250
Brass drain kit BDRCB	\$65

⚠ Don't forget to specify the finish of the Integrated drain & overflow

The 1/2" slim deck is required for undermount installation.


† ZenFlow: Integrated overflow without a trim.
* For a TMU, the Turbine cannot be installed under the bath, it must be remotely installed.

libra 6834

68" x 34" x 21"



Technical Specifications

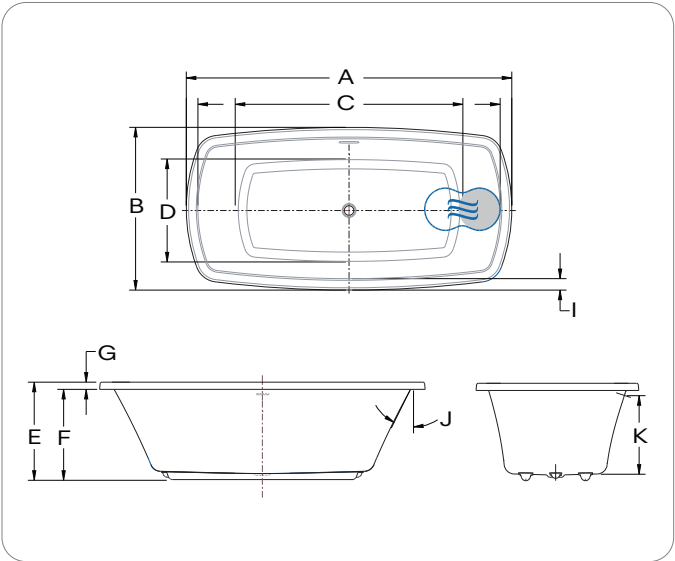

Letter	Description	Measure
A	Total length (with 1/2" deck height)	67 7/8"
	Total length (with 1-1/2" deck height)	68"
B	Total width (with 1/2" deck height)	33 7/8"
	Total width (with 1-1/2" deck height)	34"
C	Bathing well length	47 1/2"
D	Bathing well width	21 1/2"
E	Height from bottom of bath to top deck	20 1/2"
F	Height from bottom of bath to bottom deck (with 1/2" deck height)	20"
	Height from bottom of bath to bottom deck (with 1-1/2" deck height)	19"
G	Height of standard deck	1 1/2"
	Height of slim deck	1/2"
I	Deck width	2 3/8"
J	Slope of backrest	26°
K	Maximum water level	16 3/8"
	Maximum water level with AromaFlow	14 3/4"

● Indicates heated backrest (TMU) ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Turbine must be remotely installed. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000092
Approx. shipping weight	200 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.