

meridian 50

60" × 36" × 20"



Product No.

Model	TMU BMEFRI00T-XX	Soaker BMEFRI00N-XX
-------	------------------	---------------------


ThermoMasseur (TMU)

Air Jet System	\$5,295
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045

Soaker

AromaCloud®** BAROMAC	\$620
Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in, Undermount & Alcove (3 walls)
No. of bathers  Imp. gallons 38 US gallons 45	
Standard Bath Color	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

Options UPCHARGE APPLICABLE

Skirt	BSMUL-XX	Multifit BSJI-XX	SJ-1
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02		\$730	\$750
Tile Flange (specify right or left)			
Ordered with bath (not installed) BTILEN		\$85	
Factory-installed, Right BTILER, Left BTILEL, Special installation BTILEO		\$165	
Bath Pillow BPILLOW		\$250	
Comfort Cushion BCUSHIONA		\$565	
<input type="radio"/> Grey 05 <input type="radio"/> Black 02			
Drain & Overflow		Integrated ZenFlow [†] BOVERINZF-XX	16" x 35" BOVER16-XX
<input type="radio"/> Chrome 07		\$215	\$275
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02		\$175	\$305
<input type="radio"/> Brushed Nickel 09		\$215	\$305
<input type="radio"/> Polished Nickel 10		\$215	\$305
<input type="radio"/> Oil-rubbed Bronze 11		N/A	\$420
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18		\$275	N/A
If Required by Construction Code			
16" x 35" Cable driven brass drain & overflow kit BOVERBR		\$250	
Brass drain & overflow kit [‡] BDRCOB		\$250	
Brass drain kit [‡] BDRCB		\$65	

[†] ZenFlow: Integrated overflow without a trim.
[‡] When ordered with Integrated drain & overflow.
^{**} The AromaCloud® is built into the deck (factory installed).
Not available for undermount installation.


meridian 50

60" × 36" × 20"



Technical Specifications

- A** When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

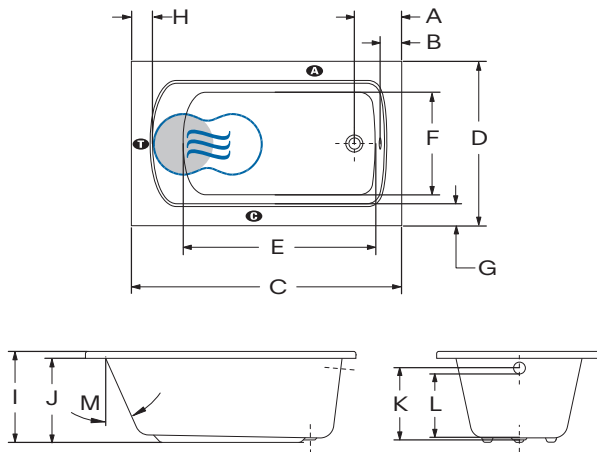

Letter	Description	Measure
A	Outside edge to center drain	10 1/8"
B	Outside edge to overflow	4 1/8"
C	Total length	60"
D	Total width	36 1/2"
E	Bathing well length	42 3/8"
F	Bathing well width	22 3/4"
G	Deck width	4 1/4"
H	Deck width at backrest end	4"
I	Height from bottom of bath to top deck	20 1/4"
J	Height from bottom of bath to bottom of deck	18 3/4"
K	Height from bottom of drain to center of overflow	16"
L	Maximum water level (Drain & overflow 16" x 35")	14 1/4"
M	Slope of backrest	24°

A AromaCloud® position **T** Turbine position (TMU) **H** Indicates heated backrest (TMU)
Ⓢ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Optional Tile Flange (specify right or left). When ordered with a factory-installed tile flange, the control will not be installed on the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000006
Approx. shipping weight	124 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.

Copyright © November 2025 | Bains Ultra Inc. All rights reserved.