

# meridian 6030

60" x 30" x 21"



## Product No.

|                     |                  |                     |
|---------------------|------------------|---------------------|
| Model Alcove, Right | TMU BMEBRIORT-XX | Soaker BMEBRIORN-XX |
| Model Alcove, Left  | TMU BMEBRIOLT-XX | Soaker BMEBRIOLN-XX |
| Model Drop-in       | TMU BMEBRIOOT-XX | Soaker BMEBRIOON-XX |

## ThermoMasseur (TMU)

|   |          |
|---|----------|
| Air Jet System                              | \$4,480  |
| Jets  | 37       |
| 1 heated backrest                           | Included |
| MiaPlus® Control                            | Included |
| BU-Touch Control Application <i>BUTOUCH</i> | \$520    |
| Geysair®                                    | Included |
| AromaCloud®** <i>BAROMAC</i>                | \$620    |
| Illuzio Chromatherapy <i>BCHRO6</i>         | \$1,045  |

## Soaker

|                                     |                       |
|-------------------------------------|-----------------------|
| AromaCloud®** <i>BAROMAC</i>        | \$620                 |
| Illuzio Chromatherapy <i>BCHRO6</i> | \$1,045               |
| WarmTouchShell® <i>BWTS</i>         | \$1,180               |
| DOT Control                         | Included with therapy |

## Features

|   |  |
|---|--|
| Installation Type   | Drop-in, Undermount & Alcove (3 walls) |
| No. of bathers  Imp. gallons 41 US gallons 50                   |  |
| Integrated Tile Flange (specify right or left)                  | Included                               |
| Standard Bath Color   |  |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02 | Included                               |


## Options UPCHARGE APPLICABLE

|   |                 |   |                             |
|---|-----------------|---|-----------------------------|
| Skirt   | <i>BSMUL-XX</i> | Multifit <i>BSJI-XX</i>                             | SJ-1                        |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02           |                 | \$730   | \$750                       |
| Bath Pillow <i>BPILLOW</i>  |                 | \$250   |                             |
| Comfort Cushion <i>BCUSHIONA</i>  |                 | \$565   |                             |
| <input type="radio"/> Grey 05 <input type="radio"/> Black 02              |                 |   |                             |
| Drain & Overflow  |                 | Integrated ZenFlow <sup>†</sup> <i>BOVERINZF-XX</i> | 16" x 35" <i>BOVER16-XX</i> |
| <input type="radio"/> Chrome 07   |                 | \$215   | \$275                       |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02           |                 | \$175   | \$305                       |
| <input type="radio"/> Brushed Nickel 09                                   |                 | \$215   | \$305                       |
| <input type="radio"/> Polished Nickel 10                                  |                 | \$215   | \$305                       |
| <input type="radio"/> Oil-rubbed Bronze 11                                |                 | N/A   | \$420                       |
| <input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18 |                 | \$275   | N/A                         |
| If Required by Construction Code  |                 |   |                             |
| 16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>          |                 | \$250   |                             |
| Brass drain & overflow kit <sup>‡</sup> <i>BDRCOB</i>                     |                 | \$250   |                             |
| Brass drain kit <sup>‡</sup> <i>BDRCB</i>                                 |                 | \$65  |                             |

<sup>†</sup> ZenFlow: Integrated overflow without a trim.  
<sup>‡</sup> When ordered with Integrated drain & overflow.  
\*\* The AromaCloud® is built into the deck (factory installed).  
Not available for undermount installation.


# meridian 6030

60" x 30" x 21"

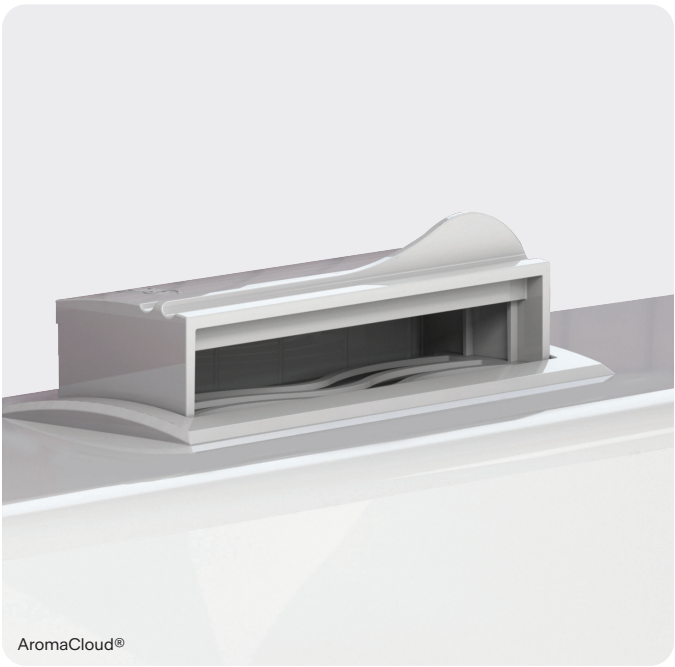

## Technical Specifications

- A** Deck modified to host the AromaCloud®. When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

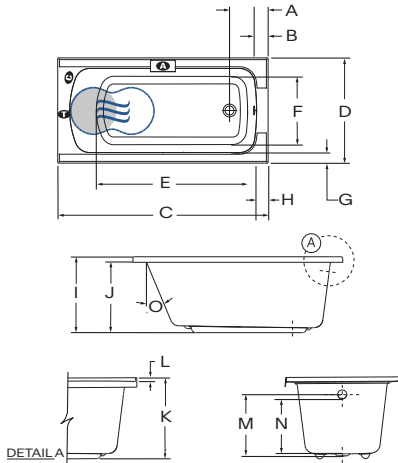

| Letter | Description                                       | Measure   |
|--------|---|-----------|
| A      | Outside edge to center drain                      | 11"       |
| B      | Outside edge to overflow                          | 4"        |
| C      | Total length                                      | 60"       |
| D      | Total width                                       | 30"       |
| E      | Bathing well length                               | 43 5/8"   |
| F      | Bathing well width                                | 19 5/8"   |
| G      | Deck width  | 3 1/4"    |
| H      | Deck width at drain end                           | 3 1/2"    |
| I      | Height from bottom of bath to top deck            | 20 1/2"   |
| J      | Height from bottom of bath to bottom of deck      | 19"       |
| K      | Height from bottom of bath to top of tile flange  | 21 1/2"   |
| L      | Tile flange height                                | 1"        |
| M      | Height from bottom of drain to center of overflow | 15 13/16" |
| N      | Maximum water level (Drain & overflow 16" x 35")  | 14 1/6"   |
| O      | Slope of backrest                                 | 24°       |

- A** AromaCloud® position. When the tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.  
**C** Control position when factory-installed (Mia® or DOT) **T** Turbine position (TMU)  
● Indicates heated backrest (TMU) ☉ Indicates WarmTouchShell® position (Soaker)

|                           |  |
|---------------------------|--|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity.   |
| Turbine                   | Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.   |
| Others                    | The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).<br><br>There is a height difference for the integrated tile flange (see Detail A). Available with or without integrated Tile Flange (specify right or left) at the same price. |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

|                         |            |
|-------------------------|------------|
| Cutting template        | # 90000053 |
| Approx. shipping weight | 100 lb     |
| Turbine power           | 550 W      |
| Air heater              | 600 W      |

## Warranty

|                       |          |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years  |
| Bath & turbine*       | 20 years |

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.