

origami 6030

60" x 30" x 21"



Product No.

Model 2" Deck	TMU BOOBRI00T-XX	Soaker BOOBRI00N-XX
Model Slim deck ½"	TMU BOOBRI01T-XX	Soaker BOOBRI01N-XX

ThermoMasseur (TMU)

Air Jet System	\$6,010
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow™† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045

Soaker

AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow™† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in: ½", 2" Alcove (3 walls): 2" & Undermount: ½"
No. of bathers ♀ Imp. gallons 38 US gallons 46	
Standard Bath Color	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
<input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL1</i>	\$685		
Skirt (2" deck only)		Multifit <i>BSMUL-XX</i>	SJ-1 <i>BSJ1-XX</i>
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$730	\$750	
Tile Flange (2" deck only, specify right or left)			
Ordered with bath (not installed) <i>BTILEN</i>	\$85		
Factory-installed. Right <i>BTILER</i> , Left <i>BTILEL</i> , Special installation <i>BTILEO</i>	\$165		
Bath Pillow <i>BPILLOW</i>	\$250		
Drain & Overflow		Integrated ZenFlow† <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
<input type="radio"/> Chrome 07	\$215	\$245	\$275
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$175	\$215	\$305
<input type="radio"/> Brushed Nickel 09	\$215	\$245	\$305
<input type="radio"/> Polished Nickel 10	\$215	\$245	\$305
<input type="radio"/> Oil-rubbed Bronze 11	N/A	N/A	\$420
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	\$275	\$305	N/A
<input type="radio"/> Matte White 32	\$275	\$245	N/A
If Required by Construction Code			
Brass drain & overflow kit† <i>BDRCOB</i>	\$250		
Brass drain kit† <i>BDRCB</i>	\$65		
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$250		

⚠ The ½" slim deck is available for drop-in and undermount installation only.


† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
Not available for undermount installation.
‡ When ordered with Integrated drain & overflow.
†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge).
Specify the finish of the drain.

origami 6030

60" x 30" x 21"



Technical Specifications

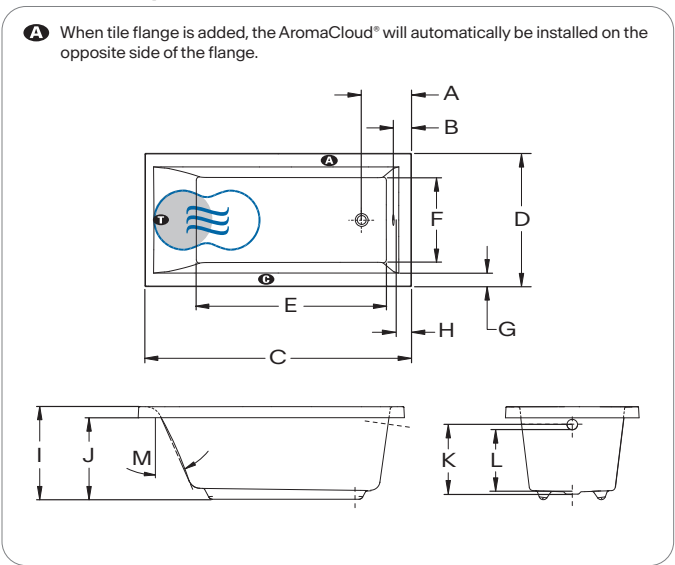

Letter	Description	Measure
A	Outside edge to center drain	11"
B	Outside edge to overflow	3 5/8"
C	Total length (with 1/2" deck height) Total length (with 2" deck height)	59 7/8" 60"
D	Total width (with 1/2" deck height) Total width (with 2" deck height)	29 7/8" 30"
E	Bathing well length	43 1/4"
F	Bathing well width	19 5/8"
G	Deck width	3 1/4"
H	Deck width	3 1/4"
I	Height from bottom of bath to top deck	21"
J	Height from bottom of bath to bottom of deck	19"
K	Height from bottom of drain to center of overflow	15 5/8"
L	Maximum water level (Drain & overflow 16" x 35") Maximum water level (Integrated drain & overflow) Maximum water level with AromaFlow	13 7/8" 14 7/8" 14 3/8"
M	Slope of backrest	24°

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **L** Indicates heated backrest (TMU)
M Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Optional Tile Flange (specify right or left). The water level will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000097
Approx. shipping weight	128 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls–LED–Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.