

origami oval 7040

70" × 40" × 22"



Undermount

Product No.

Model	Slim deck ½"	TMU	BOOVOU10T-XX	Soaker	BOOVOU10N-XX
-------	--------------	-----	--------------	--------	--------------

ThermoMasseur (TMU)

Air Jet System	\$7,035
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow†† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,180

Soaker

	\$3,815
AromaCloud®** <i>BAROMAC</i>	\$620
AromaFlow†† <i>BAROMAF</i>	\$1,000
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$390

Features

Installation Type	Drop-in & undermount 1/2"
No. of bathers 🧑🧑	Imp. gallons 54 US gallons 65
Standard Bath Color	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
UltraVelour Matte Finish (white only) <i>BVEL 1</i>			
\$685			
Universal Armrests <i>BGBGU-XX</i>			
<input type="radio"/> White 01			
\$940			
Bath Pillow <i>BPILLOW</i>			
\$250			
Drain & Overflow			
<input type="radio"/> Chrome 07			
\$215			
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02			
\$175			
<input type="radio"/> Brushed Nickel 09			
\$215			
<input type="radio"/> Polished Nickel 10			
\$215			
<input type="radio"/> Oil-rubbed Bronze 11			
N/A			
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18			
\$275			
<input type="radio"/> Matte White 32			
\$215			
If Required by Construction Code			
Brass drain & overflow kit† <i>BDRCOB</i>			
\$250			
Brass drain kit‡ <i>BDRCB</i>			
\$65			
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>			
\$250			

⚠ When ordering a Zenflow, you must specify the finish of the drain.

The Turbine must be remotely installed.


† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
Not available for Undermount installation.
‡ When ordered with Integrated drain & overflow.
†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge).

origami oval 7040

70" × 40" × 22"



Technical Specifications

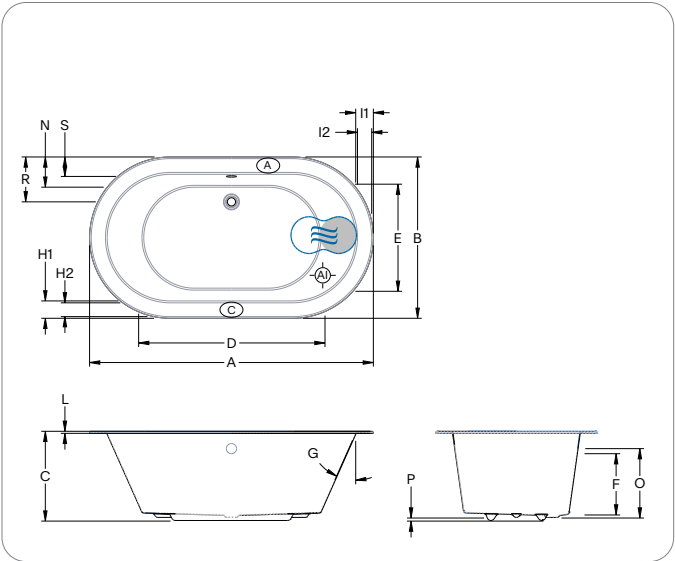

Letter	Description	Measure
A	Total length	69 ½"
B	Total width	39 ½"
C	Total height	22"
D	Bathing well length	45 ⅝"
E	Bathing well width	26 ¼"
F	Water level (Integrated D/O)	16 ⅛"
	Water level (AromaFlow)	15 ¾"
	Water level (16"x 35" D/O)	15"
G	Slope of backrest	24 °
H1	Deck width (sides)	4 ¼"
H2	Flat surface width (sides)	3 ⅜"
I1	Deck width (backrests)	4 ⅜"
I2	Flat surface width (backrests)	3 ½"
L	Deck height	½"
N	Minimum spout reach	7 ⅞"
O	Bottom of drain to center of overflow	17"
P	Distance from drain to floor	¾"
R	Outside edge to drain (widthwise)	11 "
S	Outside edge to overflow	4 ¾"

- Ⓐ AromaCloud® position Ⓑ Control position when factory-installed (Mia® or DOT)
Ⓐ Air intake position ● Indicates heated backrest (TMU)
Ⓐ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). The Turbine must be remotely installed. The water lever will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000103
Approx. shipping weight	140 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.