

vibe 6030

Freestanding
60" x 30" x 19"



Product No.

Model Drop-in Standard 1½" deck	TMU BVIBRD00T-XX	Soaker BVIBRD00N-XX
Model Alcove, L Standard 1½" deck	TMU BVIBRBOLT-XX	Soaker BVIBRBOLN-XX
Model Alcove, R Standard 1½" deck	TMU BVIBRBORT-XX	Soaker BVIBRBORN-XX

Model Slim deck ½"	TMU BVIBRU10T-XX	Soaker BVIBRU10N-XX
Model Slim deck, Alcove, L ½"	TMU BVIBRB1LT-XX	Soaker BVIBRB1LN-XX
Model Slim deck, Alcove, R ½"	TMU BVIBRB1RT-XX	Soaker BVIBRB1RN-XX

ThermoMasseur (TMU)

Air Jet System	\$5,140
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$520
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$1,045

Soaker

Illuzio Chromatherapy BCHRO6	\$1,045
WarmTouchShell® BWTS	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Drop-in & Alcove (3 walls): ½", 1½" Undermount: ½"
No. of bathers ♀ Imp. gallons 36 US gallons 44	Integrated tile flange Included
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-XX	
White 01 Biscuit 02	Installed & Included
Standard Bath Color p. 17	
White 01 Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish	
UltraVelour Matte Finish (white only) BVEL1	\$685
Universal Armrests BGBGU-XX	
White 01	\$940
Skirt Multifit (standard 1½" deck only) BSMUL-XX	
White 01 Biscuit 02	\$730
Bath Pillow BPILLOW	\$250
Drain & Overflow	Integrated ZenFlow† BOVERINIZF-XX Integrated with trim BOVERIN-XX
White 01 Biscuit 02	Incl. \$40
Matte White 32 Chrome 07	\$40 \$75
Brushed Nickel 09 Polished Nickel 10	
Matte Black 19 Satin Brass 18	\$100 \$130
If Required by Construction Code	
Brass drain & overflow kit BDRCOB	\$250
Brass drain kit BDRCB	\$65

⚠ Don't forget that an integrated tile flange is available at no extra cost. You must specify drain position (right or left). With the control on the deck, a complete shower door cannot be installed.

Don't forget to specify the finish of the Integrated drain & overflow. The ½" deck is required for under-mount installation.


† ZenFlow: Integrated overflow without a trim.

vibe 6030

60" x 30" x 19"



Technical Specifications

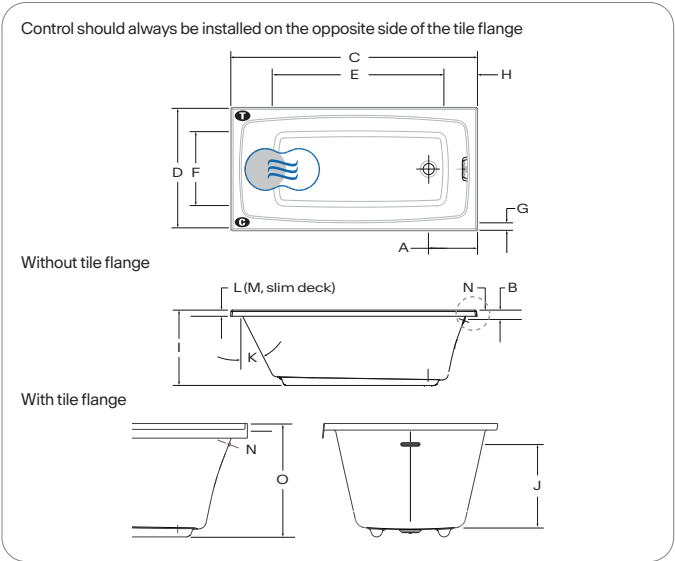

Letter	Description	Measure
A	Outside edge to center drain	10 1/8"
B	Outside edge to center of overflow	2 1/2"
C	Total length	60"
D	Total width	30"
E	Bathing well length	44"
F	Bathing well width	19 1/8"
G	Deck width	1 7/8"
H	Deck width at drain end	2"
I	Height from bottom of bath to top deck	18 1/2"
J	Maximum water level	14 5/16"
K	Slope of backrest	27°
L	Height from bottom of deck to top std deck	1 1/2"
M	Height from bottom of deck to top slim deck	1/2"
N	Tile flange height	1"
O	Height of bath from bottom of bath to top of tile flange	19 1/2"

● Control position when factory-installed (Mia® or DOT) ● Turbine position (TMU)
● Indicates heated backrest (TMU) ● Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Turbine must be remotely installed in certain conditions. Integrated tile flange is included (specify right or left).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000106
Approx. shipping weight	200 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.