



PRODUCT SHEET

ESSENCIA 6838

68" X 38" X 26"



FREESTANDING

| | |
|----------------------------|----|
| THERMOMASSEUR® BATH | \$ |
| TUB no therapy | \$ |

THERMOMASSEUR (TMU)

| | |
|----------------------------------|----------|
| Jets | 59 |
| 1 heated backrest | included |
| 1 heated headrest | included |
| MiaMulti® Control* | included |
| Geysair® | included |
| AromaCloud® | \$ |
| Illuzio Chromatherapy NEW | \$ |

TUB (soaker)

| | |
|----------------------------------|-----------------------|
| AromaCloud® | \$ |
| Illuzio Chromatherapy NEW | \$ |
| WarmTouchShell® | \$ |
| DOT control | included with therapy |

FEATURES

| | | | |
|-------------------|--------------|--------------------------|---------------|
| Installation type | Freestanding | | |
| No. of bathers | 2 | Armrests | 2 |
| US gallons | 67 | Grab bars (color match) | 2 |
| Imp. gallons | 56 | Footrest | 1 |
| Raised seat | 1 | Waste & overflow (16x35) | inst. & incl. |
| Inverted V | 1 | | |

FEATURES

COLOR

Standard



White

OPTIONAL UPCHARGE APPLICABLE

FINISH

UltraVelour Matte Finish (White Only) \$

CLEAR ACRYLIC GRAB BARS

With Chrome, Brass or Brushed nickel inserts \$

INTEGRATED WASTE & OVERFLOW

White, Biscuit, Chrome, Brass, Brushed nickel, Polished nickel \$

ISLAND TUB DRAIN™**

Island Tub Drain™
FOR ESSENCIA 6838, THE ISLAND TUB DRAIN IS COMPATIBLE WITH **BRASS WASTE & OVERFLOW KIT (BDRCOB)**, **BRASS WASTE KIT (BDRCB)** AND **CABLE DRIVEN BRASS WASTE & OVERFLOW KIT (BOVERBR)**. \$



DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY.

DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.

* FOR TMU, CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

** AN ISLAND TUB DRAIN IS REQUIRED WHEN THERE IS NO ACCESS UNDER THE BATH.

1 800 463.2187
info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
From 8 a.m. to 5 p.m. on Friday (EST)

BainUltra®

The quest for your wellness™

www.bainultra.com

ESSENCIA 6838 68" X 38" X 26"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000057


OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- TMU: Control must be wall-mounted.
- TMSU: Dot controls are located on either sides of the AromaCloud.

TOTAL PRICE

\$

FREESTANDING INSTALLATION

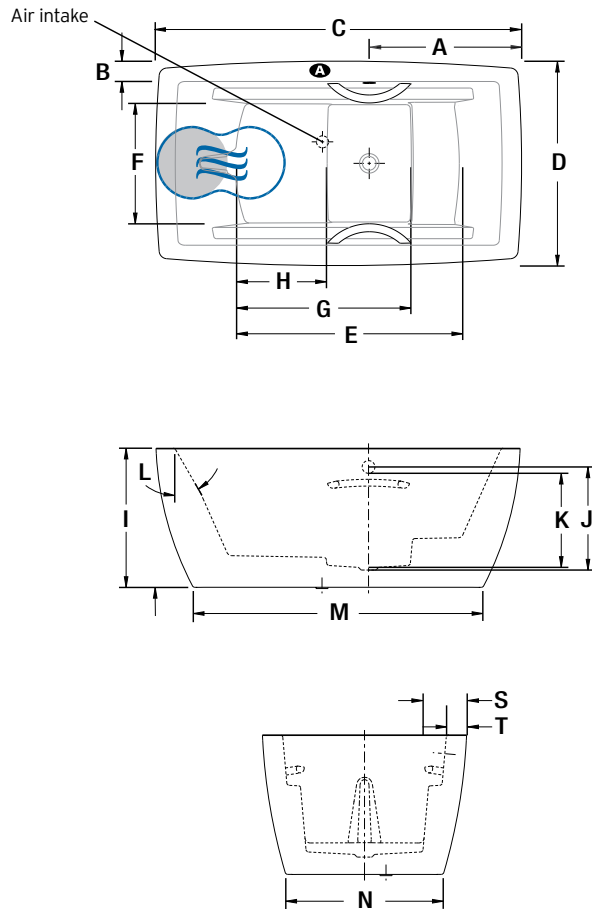

| LETTER | DESCRIPTION | MEASURE |
|--------|---|---------|
| A | Outside edge to center waste | 28 1/4" |
| B | Deck width | 3 3/4" |
| C | Total length | 68" |
| D | Total width | 38" |
| E | Bathing well length | 42" |
| F | Bathing well width | 22 3/8" |
| G | Bottom bathing well length | 32 3/8" |
| H | Raised seat length | 16 5/8" |
| I | Height from bottom of tub to top deck | 26" |
| J | Height from waste to center of overflow | 19 1/4" |
| K | Maximum water level | 17 5/8" |
| L | Slope of backrest | 30° |
| M | Base length | 54 1/8" |
| N | Base width | 29 1/4" |
| S | Minimum spout reach | 7 3/4" |
| T | Outside edge to overflow | 4" |

A AromaCloud position

● Heated backrest (TMU)

☞ WarmTouchShell position

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|---|
| Hot water supply required | Should be 70% of water capacity of tub or greater. |
| Turbine | Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

| | |
|-------------------------|---------|
| Approx. shipping weight | 290 lbs |
| Turbine power | 550 W |
| Air heater | 600 W |

WARRANTY

| | |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.