



PRODUCT SHEET

# ESSENCIA DESIGN 7438

74" X 38" X 20"



	DROP-IN	UNDERMOUNT
<b>THERMOMASSEUR® BATH</b>	\$	\$
<b>TUB</b>	\$	\$

THERMOMASSEUR (TMU)	
Jets	37
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
Illuzio Chromatherapy <b>NEW</b>	\$

TUB (soaker)	
Illuzio Chromatherapy <b>NEW</b>	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation types	Drop-In & Undermount		
No. of bathers	↓	Imp. gallons	46
US gallons	55	Integrated waste & overflow	inst. & incl.
INTEGRATED WASTE & OVERFLOW			
Chrome, White, Biscuit			
Brass, Brushed Nickel, Polished Nickel			

**FEATURES**

**COLOR**

Standard	
 White	 Biscuit

**OPTIONAL UPCHARGE APPLICABLE**

**FINISH**

UltraVelour Matte Finish (White Only)	\$
---------------------------------------	----

 \* FOR TMU, CONTROL AND FAUCET CANNOT BE INSTALLED ON THE DECK OF THE BATH.

1 800 463.2187  From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 info@bainultra.com  From 8 a.m. to 5 p.m. on Friday (EST)

# ESSENCIA DESIGN 7438 74" X 38" X 20"

## ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

# 90000071




### OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- TMU: Control must be wall-mounted.

TOTAL PRICE

\$

## DROP-IN/UNDERMOUNT INSTALLATION

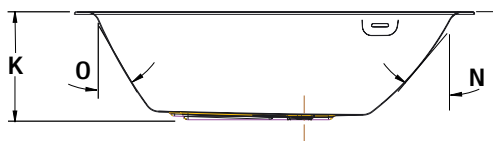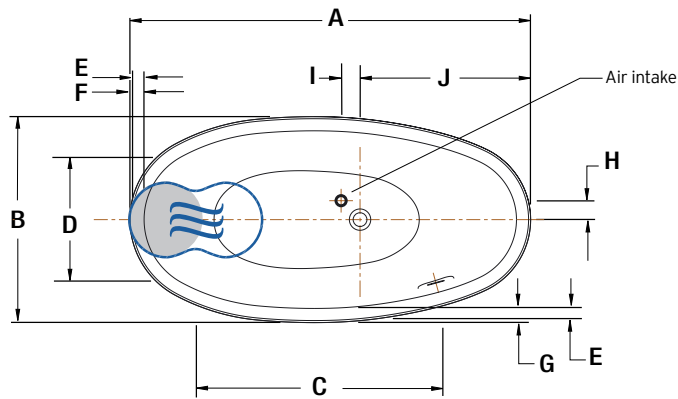

LETTER	DESCRIPTION	MEASURE
A	Total length	74"
B	Total width	38"
C	Bathing well length (at jets height)	44 7/8"
D	Bathing well width (at jets height)	22 5/8"
E	Deck width (top)	2 1/4"
F	Deck width (backrest round edge)	2 5/8"
G	Deck width (side round edge)	2 5/8"
H	Distance from center air intake to center drain (long axis)	3 1/2"
I	Distance from center air intake to center drain (trans axis)	3 1/2"
J	Distance from center drain to deck edge	31 1/2"
K	Bath height	20"
L	Height from drain to top of deck	19 1/4"
M	Height from drain to center of overflow	16 3/4"
N	Slope	40°
O	Slope of backrest	29°
P	Deck height (slim deck)	1/2"
Q	Distance from deck to overflow	7 3/8"

● Heated backrest (TMU)

☁ WarmTouchShell position (TMSU)

## TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". <b>Standard connection is 20 A, 120 V, 60 hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 hz</b> , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

Approx. shipping weight	132 lbs
Turbine power	550 W
Air heater	600 W

## WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.