



PRODUCT SHEET
ELLIPSE 6636
 66" X 36" X 21"



THERMOMASSEUR® BATH	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	38
1 heated backrest	included
MiaPlus® Control	included
Geysair®	included
AromaCloud®	\$
Illuzio Chromatherapy NEW	\$
2 nd heated backrest (advanced technology)	\$

TUB (soaker)	
AromaCloud®	\$
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
2 nd WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation types	Drop-in & Undermount *		
No. of bathers		Imp. gallons	40
US gallons	48		

OPTIONAL UPCHARGE APPLICABLE

COLOR	
Standard	
White	Biscuit
Optional	
Gray	\$
CONTROL (TMU ONLY)	
MiaMultij®	\$
WASTE & OVERFLOW	
	16" X 35"
Chrome	\$
White, Biscuit	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

DON'T FORGET TO INDICATE FLAT OR ROLLED DECK.
 * THE AROMACLOUD IS NOT AVAILABLE WITH UNDERMOUNT INSTALLATION.

1 800 463.2187 info@bainultra.com | From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

ELLIPSE 6636 66" X 36" X 21"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000055





OTHERS

- There is a height difference for the rolled deck (see drawing Detail A).

TOTAL PRICE

\$

DROP-IN/UNDERMOUNT INSTALLATION

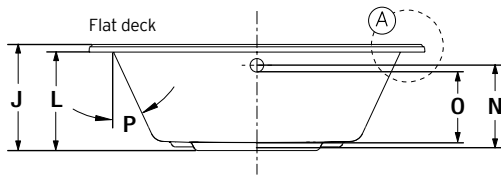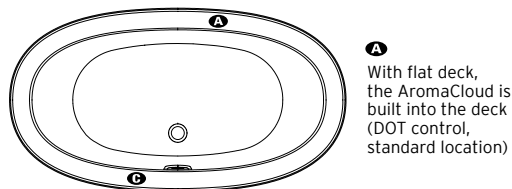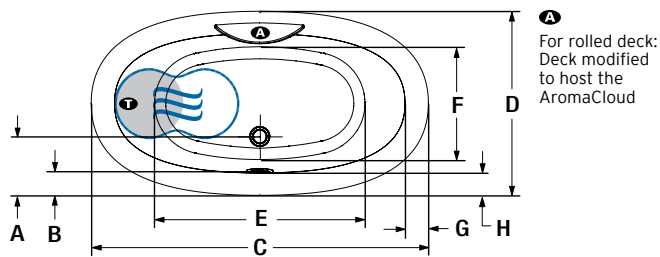

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center waste	11 1/2"
B	Outside edge to overflow	4 5/8"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width at backrest end	4 3/8"
H	Flat surface width	4 1/4"
I	Rolled deck width	4 3/4"
J	Height from bottom of tub to top deck	21"
K	Height from bottom of tub to top deck	22"
L	Height from bottom of tub to bottom of lip	19 1/2"
M	Height from bottom of lip to top deck	2 1/2"
N	Height from waste to center of overflow	16 5/8"
O	Maximum water level	14 7/8"
P	Slope of backrest	25°

A AromaCloud position

● Heated backrest (TMU)

C Control position when factory-installed (Mia or Dot)

☰ WarmTouchShell position

T Turbine position (TMU)

Available with flat or rolled deck.

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A, 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz , dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	100 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.