

	ORIGINAL Quartz Deck with Seam	GRAND LUXURY One Piece Quartz Deck
THERMOMASSEUR® BATH	\$	\$
TUB	\$	\$

THERMOMASSEUR (TMU)		
Jets	44	
1 heated backrest	included	
MiaPlus® Control (uninstalled)	included	
Geysair®	included	
AromaCloud®	N/A	
Illuzio Chromatherapy NEW	\$	
2 nd heated backrest	\$	

TUB (soaker)	
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy
2 nd WarmTouchShell®	\$

FEATURES			
Installation	Drop-in or Alcove (3 walls)		
No. of bathers	ŤŤ	Imp. gallons	53
US gallons	63	Integrated waste & overflow	inst. & incl.
INTEGRATED WASTE & OVERFLOW			

INTEGRATED WASTE & OVERFLOW	
Chrome, White	
Brass, Brushed Nickel, Polished Nickel	

COLOR (INNER SHELL)	QUARTZ DECK COLOR			
Standard White	Standar Grey Expo	Noka	Jet Black	Lagos Blue

OPTIONAL UPCHARGE APPLICABLE			
FINISH (INNER SHELL)			
\$			
\$			
MONARCH SKIRT 7220			
\$			
CONTROL (TMU ONLY)			
\$			
WASTE & OVERFLOW (16"X35")			
\$			
\$			
\$			
\$			
TILE FLANGE (specify front or back)			
\$			
\$			

DON'T FORGET THAT THIS MODEL IS AVAILABLE IN WHITE ONLY WITH CHOICE OF DECK COLOR.

DON'T FORGET TO SPECIFY THE FINISH OF THE INTEGRATED WASTE & OVERFLOW.



From 8 a.m. to 8 p.m. Monday to Thursday (EST) From 8 a.m. to 5 p.m. on Friday (EST)



MONARCH 7240 72" X 40" X 21"


ACCESSORIES (OPTIONAL)

OTHER Control cannot be installed on the quartz deck.

TOTAL PRICE

\$

DROP-IN/ALCOVE INSTALLATION

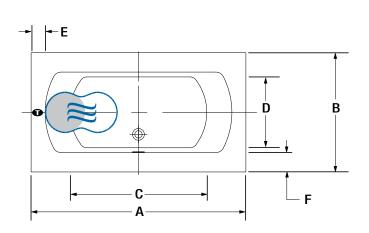



LETTER	DESCRIPTION	MEASURE
Α	Total length	72"
В	Total width	40"
С	Bathing well length (at height of jets)	47 1/4"
D	Bathing well width (at height of jets)	24 1/4"
E	Deck width (edges)	4 7/8"
F	Deck width (sides)	6 5/8"
G	Tub height	21"
Н	Height from waste to center of overflow	15 3/4"
I	Outside edge to center waste	12 5/8"
J	Slope of backrest	26°
K	Quartz deck height	3/4"

Turbine position (TMU)

Heated backrest (TMU

WarmTouchShell position





TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 20 A. 120 V, 60 hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option , a second line is needed 15 A. 120 V, 60 hz , dedicated line with a GFCI.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight	280 lbs
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Quartz Deck*	15 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for step reparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.