

PRODUCT SHEET

VIBE 5828

58" X 28" X 21"



THERMOMASSEUR®	\$
TUB	\$

THERMOMASSEUR (TMU)	
Jets	40
1 heated backrest	included
MiaPlus® Control*	included
Geysair®	included
Illuzio Chromatherapy NEW	\$

TUB	
Illuzio Chromatherapy NEW	\$
WarmTouchShell®	\$
DOT control	included with therapy

FEATURES			
Installation type		Freestanding	
No. of bathers	⚓	Integrated waste & overflow	inst. & incl.
US gallons	44		
Imp. gallons	36		
INTEGRATED WASTE & OVERFLOW			
Chrome, White			
Brass, Brushed Nickel, Polished Nickel			
If required by construction code			
Brass waste and overflow kit		\$	
Brass waste kit		\$	

FEATURES	
COLOR	
Standard	
<input type="checkbox"/>	White

OPTIONAL UPCHARGE APPLICABLE	
FINISH	
UltraVelour Matte Finish (White Only)	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™	\$
CONTROL	
MiaMulti	\$



Don't forget that this model is available in **white only**.

Don't forget to specify the finish of the integrated waste & overflow.

* Control and faucet cannot be installed on the deck of the bath.

** An Island Tub Drain is required when there is **no access under the bath**.

VIBE 5828

58" X 28" X 21"

ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000078


OTHERS

- Faucet must be freestanding or wall-mounted.
- The turbine must be remotely installed.
- Controls cannot be installed on the deck of the bath.

TOTAL PRICE

\$

FREESTANDING INSTALLATION


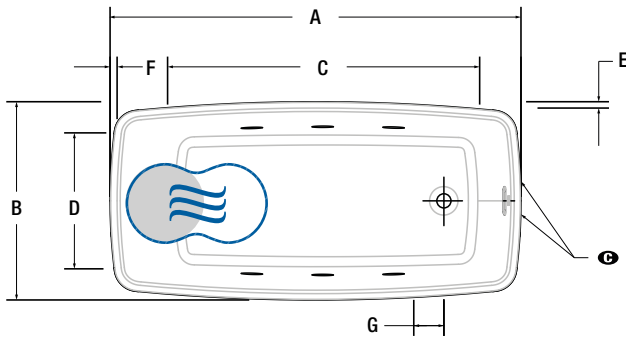


LETTER	DESCRIPTION	MEASURE
A	Total length	58"
B	Total width	28"
C	Bathing well length	44"
D	Bathing well width	19 1/8"
E	Deck width	7/8"
F	Deck width at headrest	1"
G	Center waste to air intake	2 3/4"
H	Total height	21"
I	Maximum water level	14 1/4"
J	Slope of backrest	27°
K	Base length	52 1/8"
L	Base width	22 1/8"

G Control position when factory-installed (Mia or Dot)

● Indicates heated backrest (TMU)

☞ Indicates WarmTouchShell position

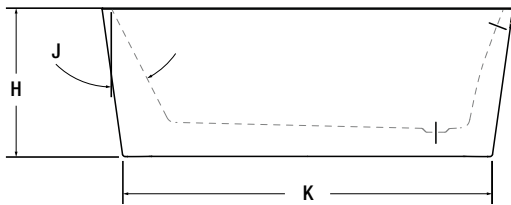

TECHNICAL SPECIFICATIONS

Hot water supply required Should be 70% of water capacity of tub or greater.

Turbine Access to the pump must be at least 18" X 22". **Standard connection is 20 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI.**
Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Approx. shipping weight 225 lbs

Turbine power 550 W

Air heater 600 W

WARRANTY

Controls-LED-Geysair* 5 years

Bath & turbine* 20 years

* Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

