# **BEONE** 4639

## 46" x 39" x 30" (FREESTANDING)

The first of its kind, a Japanese style bathtub, BeOne provides an extraordinarily unique bathing experience. The air jets coupled with its circular design create a powerful massage that is unlike any other offered by traditional Air System.



### **PRODUCT NO.**

MODEL	тми	TUB	
Freestanding	BBODOF00T-XX	BBODOF00N-XX	
THERMOMASSEUR (TI Hydro-thermo massag	\$9,360		
Jets	40		
1 heated backrest	Included		
MiaPlus <sup>®</sup> Control* (not ins	Included		
BU-Touch Control Applic	Included		
Geysair®	Included		
AromaCloud®	N/A		
Illuzio Chromatherapy Bo	\$925		
<b>TUB</b> Soaker		\$7,280	
Illuzio Chromatherapy Bo	o Chromatherapy BCHRO6 \$9		
WarmTouchShell <sup>®</sup> BWTS	\$1,125		
DOT control	Included with therapy		
FEATURES			

FEATURES						
Installation type			Freestanding			
No. of bathers	•	Imp. gallons		44		
US gallons	53	Raised seat		1		
INTEGRATED WASTE & OVERFLOW BOVERINI-XX						
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10, Matte White with UltraVelour finish 32		Installed & Included				
STANDARD COLOR						
White 01				Included		

#### **OPTIONS (UPCHARGE APPLICABLE)**

COLOR		
Black / White 66	\$475	
FINISH		
UltraVelour Matte Finish (white only) BVEL2	\$850	
INTEGRATED WASTE & OVERFLOW BOVERINI-XX		
Matte Black 19, Satin Brass 18	\$120	
ISLAND TUB DRAIN™**		
Island Tub Drain <sup>™</sup> BISLDD	\$260	
Cast Iron Island Tub Drain <sup>™</sup> BISLDDCI	\$310	
IF REQUIRED BY CONSTRUCTION CODE		
Brass waste & overflow kit BDRCOB	\$240	
Brass waste kit BDRCB	\$60	

Don't forget to specify the **finish of the integrated waste & overflow**. \* Control must be wall-mounted. Faucets must be freestanding


or wall-mounted.
\*\* An Island Tub Drain™ is required when there is **no access under the bath**, and turbine is installed under the bath.







## **BEONE** 4639 (FREESTANDING)

### INSTALLATION





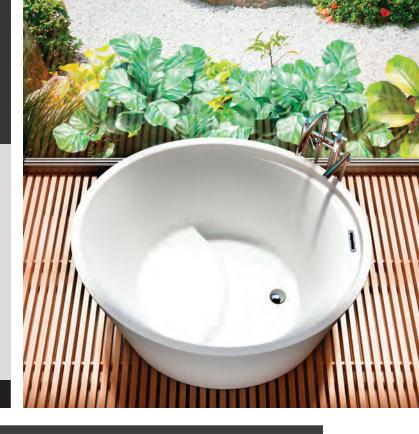

LETTER	DESCRIPTION	MEASURE
А	Total length	46"
в	Total width	38 3/4"
с	Bathing well length	30 3/4"
D	Bathing well width	27 1/4"
E	Deck width	1 3/8"
F	Outer edge to center of waste	12 3/8"
G	Depth of seat	16 1/4"
н	Height of seat	5 3/16"
I	Total height at headrest	30"
J	Total height at overflow	27"
к	Slope of backrest	16°
L	Top to seat height	20 5/8"
м	Maximum water level	21 1/2"
N	Base length	41 1/8"
0	Base width	33 7/8"
Р	Height from drain to floor	3 5/8"

Indicates heated backrest (TMU)

(10) Indicates WarmTouchShell® position (TUB)

Turbine position (TMU)

#### TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.	Cutting template	# 9000083
Turbine	Turbine is factory installed, so access to the pump must be at least 18" x 22". <b>Standard connection</b> is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	Approx. shipping weight	240 ll
		Turbine power	550 V
		Air heater	600 V
Others	<ul> <li>The Geysair<sup>®</sup> is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access).</li> <li>Faucet must be freestanding or wall-mounted.</li> <li>The turbine can be remotely installed.</li> <li>Controls cannot be installed on the deck of the bath.</li> </ul>	WARRANTY	
		Controls-LED-Geysair*	5 years
		Bath & turbine*	20 years
	t be installed by certified professionals only and according to our Owner's Manual as well as federal,	* Some restrictions apply   www.bainult	:ra.com/warranty

provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra\* assumes no responsibility for preparatory work done prior to the product being on site.

# 90000083 240 lb 550 W 600 W

> 5 years 20 years