

# libra 6834

68" x 34" x 21"



## Product No.

Model Drop-in, Std 1½" deck	TMU BLIYU00T-XX	Soaker BLIYU00N-XX
Model Slim deck	TMU BLIYU10T-XX	Soaker BLIYU10N-XX

## ThermoMasseur (TMU)

Air Jet System	\$5,535
Jets	42
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaFlow* <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

## Soaker

AromaFlow* <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

## Features

Installation Type	Drop-in & Undermount
No. of bathers 🧑🧑 1mp. gallons 51 US gallons 61	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-XX</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

## Options UPCHARGE APPLICABLE

Finish <i>p.17</i>	
<input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL1</i>	\$650
Universal Armrests <i>BGBGU-XX p.16</i>	
<input type="radio"/> White 01	\$895
Bath Pillow <i>BPILLOW p.252</i>	\$240
Drain & Overflow <i>p.14</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Incl.
<input type="radio"/> Matte White 32 <input type="radio"/> Chrome 07	\$40
<input type="radio"/> Brushed Nickel 09 <input type="radio"/> Polished Nickel 10	\$70
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	\$95
Integrated ZenFlow† <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
If Required by Construction Code or installed with ITD	
Brass drain & overflow kit <i>BDRCOB</i>	\$240
Brass drain kit <i>BDRCB</i>	\$60


⚠ Don't forget to specify the finish of the Integrated drain & overflow

Please note that the 1½" is required for undermount installation.


† ZenFlow: Integrated overflow without a trim.  
\* For a TMU, the Turbine cannot be installed under the bath, it must be remotely installed.

# libra 6834

68" x 34" x 21"

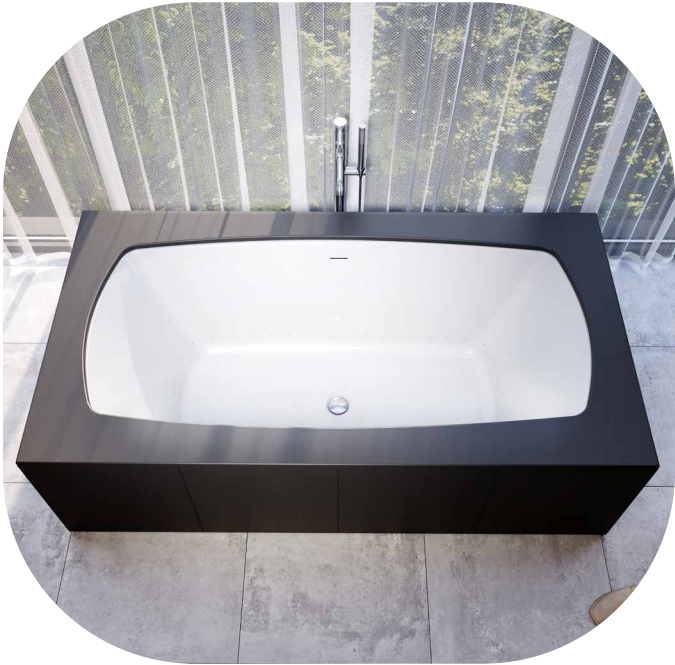

## Technical Specifications

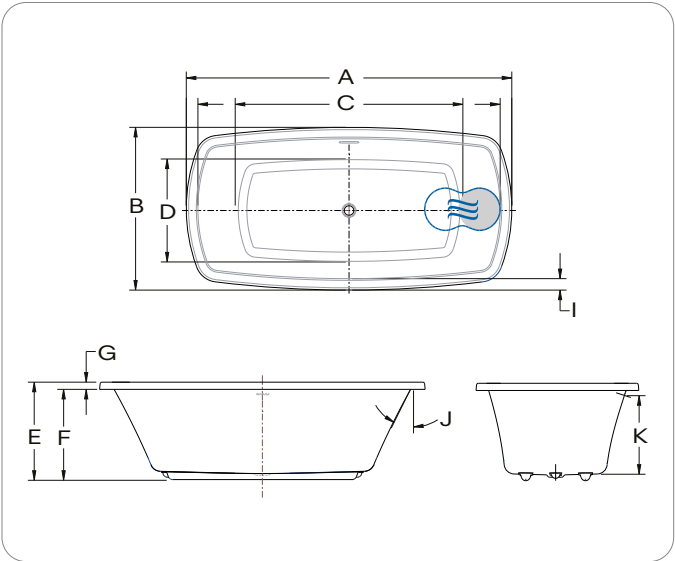

Letter	Description	Measure
A	Total length (with 1/2" deck height)	67 7/8"
	Total length (with 1-1/2" deck height)	68"
B	Total width (with 1/2" deck height)	33 7/8"
	Total width (with 1-1/2" deck height)	34"
C	Bathing well length	47 1/2"
D	Bathing well width	21 1/2"
E	Height from bottom of bath to top deck	20 1/2"
F	Height from bottom of bath to bottom deck (with 1/2" deck height)	20"
	Height from bottom of bath to bottom deck (with 1-1/2" deck height)	19"
G	Height of standard deck	1 1/2"
	Height of slim deck	1/2"
I	Deck width	2 3/8"
J	Slope of backrest	26°
K	Maximum water level	16 3/8"
	Maximum water level with AromaFlow	14 3/4"

● Indicates heated backrest (TMU)    ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).  Turbine must be remotely installed. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000092
Approx. shipping weight	200 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.