

NEW

# LIBRA OVAL 6635

66" x 35" x 27" (FREESTANDING)

Libra's symmetrical lines and universal look will be a perfect fit in any style bathroom. The identical soft slope of the interior walls brings comfort and relaxation for one or two bathers.



## PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BLIHOF00T-XX	BLIHOF00N-XX

THERMOMASSEUR (TMU)	
Hydro-thermo massage • Air jet system	\$
Jets	34
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application	Included
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy <a href="#">BCHRO6</a>	\$
2 <sup>nd</sup> heated backrest (WTS-1 zone) <a href="#">BSHB</a>	\$

TUB	
Soaker	\$
Illuzio Chromatherapy <a href="#">BCHRO6</a>	\$
WarmTouchShell® <a href="#">BWTS</a>	\$
DOT control	Included with therapy
2 <sup>nd</sup> WarmTouchShell® <a href="#">BWTS2</a>	\$

FEATURES			
Installation type		Freestanding	
No. of bathers		Imp. gallons	46
US gallons	56	Armrests	2
INTEGRATED WASTE & OVERFLOW <a href="#">BOVERINI-XX</a>			
White <a href="#">01</a> , Chrome <a href="#">07</a> , Brushed Nickel <a href="#">09</a> , Polished Nickel <a href="#">10</a>		Installed & Included	
STANDARD COLOR			
	White <a href="#">01</a>		Included

## OPTIONS (UPCHARGE APPLICABLE)

COLOR	
	Black / White <a href="#">66</a> \$
FINISH	
UltraVelour Matte Finish (white only) <a href="#">BVEL</a>	\$
INTEGRATED WASTE & OVERFLOW <a href="#">BOVERINI-XX</a>	
Matte Black <a href="#">19</a> , Satin Brass <a href="#">18</a>	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™ <a href="#">BISLDD</a>	\$
Cast Iron Island Tub Drain™ <a href="#">BISLDDCI</a>	\$
IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD	
Brass waste & overflow kit <a href="#">BDRCOB</a>	\$
Brass waste kit <a href="#">BDRCB</a>	\$

Don't forget to specify the **finish of the integrated waste & overflow**.  
 \* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.  
 \*\* An Island Tub Drain™ is recommended when there is **no access under the bath**.


<b>TOTAL PRICE</b>	\$
--------------------	----



**LIBRA OVAL 6635 (FREESTANDING)**



**INSTALLATION**

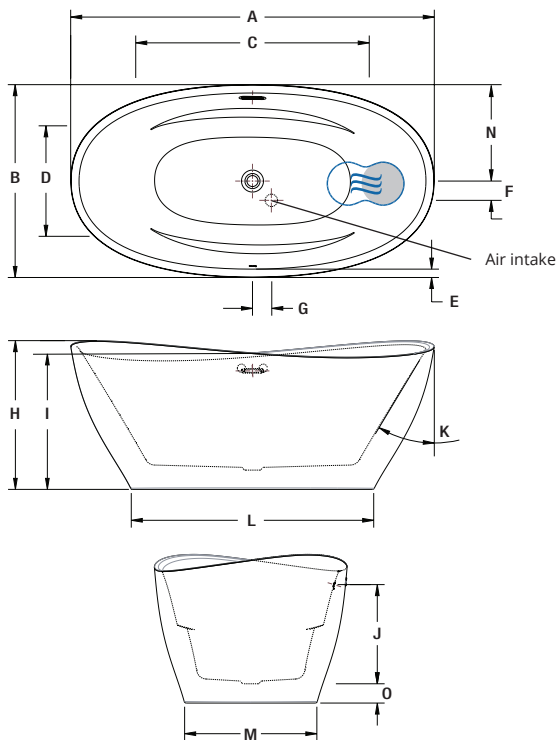

LETTER	DESCRIPTION	MEASURE
A	Total length	66"
B	Total width	35"
C	Bathing well length	42 3/8"
D	Bathing well width	23 3/16"
E	Deck width	1 1/2"
F	Center waste to air intake (side)	3 1/2"
G	Center waste to air intake (front)	3 1/2"
H	Maximum total height	27"
I	Minimum total height	24"
J	Maximum water level	18"
K	Slope of backrests	31°
L	Base length	44"
M	Base width	18"
N	The outer edge to center of waste	17 1/2"
O	Height from drain to floor	3 1/2"

- Indicates heated backrest (TMU)
- ☉ Indicates WarmTouchShell® position (TUB)

**TECHNICAL SPECIFICATIONS**

<b>Hot water supply required</b>	The hot water supply should be 70% or more of the bath's total water capacity.
<b>Turbine</b>	Turbine is remotely installed; access to the pump must be at least 18" x 22". <b>Standard connection is 20 A, 120 V, 60 Hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 Hz</b> , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
<b>Others</b>	<ul style="list-style-type: none"> <li>- The Geysair is located on the same side as the heated backrest. It must <b>NOT</b> be relocated. It must be <b>connected to the hot water supply</b> and be accessible (provide access).</li> <li>- Faucet must be freestanding or wall-mounted.</li> <li>- The turbine must be <b>remotely installed</b>.</li> <li>- Controls cannot be installed on the deck of the bath.</li> </ul>

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

<b>Cutting template</b>	# 90000086
<b>Approx. shipping weight</b>	230 lbs
<b>Turbine power</b>	550 W
<b>Air heater</b>	600 W
<b>WARRANTY</b>	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.