

lunessa 7038

Freestanding
70" x 38" x 25"



Product No.

Model	Freestanding	TMU	BLUZOF00T	Soaker	BLUZOF00N
-------	--------------	-----	-----------	--------	-----------

ThermoMasseur (TMU)

Air Jet System	\$9,910
Jets	40
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application	Included
Geysair®	Included
AromaFlow†† BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

AromaFlow†† BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 53 US gallons 63 Armrests 2	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
○ White 01	Installed & Included
Standard Bath Color p.17	
○ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
☑ Black / White 66		\$475
Finish p.17		
○ UltraVelour Matte Finish (white only) BVEL3		\$1,025
Bath Pillow BPILLOW p.252		\$240
Drain & Overflow p.14	Integrated ZenFlow† BOVERINIZF-XX	Integrated with trim BOVERIN-XX
○ White 01	Incl.	\$40
○ Matte White 32	Chrome 07	\$40
○ Brushed Nickel 09	Polished Nickel 10	\$70
☑ Matte Black 19	Satin Brass 18	\$95 \$125
Island Tub Drain™*** p.15		
Island Tub Drain™ BISLDD		\$260
Cast Iron Island Tub Drain™ BISLDDCI		\$310
If Required by Construction Code or installed with ITD		
Brass drain & overflow kit BDRCOB		\$240
Brass drain kit BDRCB		\$60

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is recommended when there is no access under the bath.
†† When ordering an AromaFlow, an Integrated drain & overflow is mandatory (Included). Specify the finish of the drain.




Iunessa 7038

Freestanding
70" x 38" x 25"



Technical Specifications

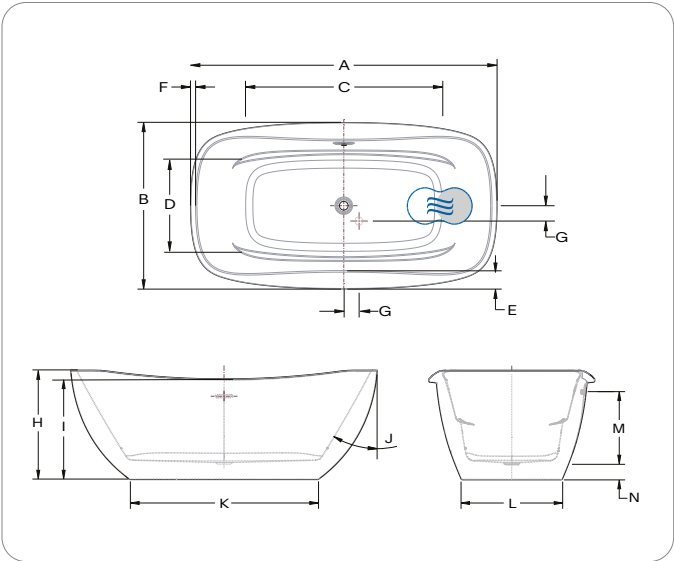

Letter	Description	Measure
A	Total length	70"
B	Total width	38"
C	Bathing well length	47"
D	Bathing well width	21 1/4"
E	Deck width (side)	4 1/8"
F	Deck width (end)	1 1/2"
G	Center drain to air intake	3 1/2"
H	Maximum total height	25"
I	Minimum total height	23"
J	Slope of backrests	30°
K	Base length	43 1/4"
L	Base width	23 1/4"
M	Maximum water level	16 3/8"
	Maximum water level with AromaFlow	14 5/8"
N	Height from drain to floor	3 1/4"

● Indicates heated backrest (TMU) ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000094
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.