

# OPUS 6434


64" x 34" x 25" (FREESTANDING)

A symphony of lines and curves inspired by the creative genius of the artist.

NEW


## PRODUCT NO.

| MODEL        | TMU       | TUB       |
|--------------|-----------|-----------|
| Freestanding | BOS2RF00S | BOS2RF00F |

| THERMOMASSEUR (TMU)   |  | \$11,750 |
|---|--|----------|
| Hydro-thermo massage • Air jet system  |  |          |
| Jets  |  | 42       |
| 1 heated backrest   |  | Included |
| MiaPlus® Control (not installed)  |  | Included |
| BU-Touch Control Application <a href="#">BUTOUCH</a>  |  | Included |

| TUB Soaker  | \$8,900 |
|--|---------|
|--|---------|

## FEATURES

|                   |   |              |               |
|-------------------|---|--------------|---------------|
| Installation type |   | Freestanding |               |
| No. of bathers    |  | Imp. gallons | TMU 62 TUB 68 |
| US gallons        | TMU 74 TUB 81   | Armrests     | 2             |

## INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

|   |                      |
|---|----------------------|
| Matte White** <a href="#">32</a> , Chrome <a href="#">07</a> , Brushed Nickel <a href="#">09</a> , Polished Nickel <a href="#">10</a> | Installed & Included |
|---|----------------------|

## STANDARD COLOR

|   |          |
|---|----------|
|  | Included |
| White <a href="#">01</a>  |          |

## FINISH

|              |          |
|--------------|----------|
| Satin Finish | Included |
|--------------|----------|

## OPTIONS (UPCHARGE APPLICABLE)

### INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

|   |       |
|---|-------|
| Matte Black <a href="#">19</a> , Satin Brass <a href="#">18</a> | \$120 |
|---|-------|

### ISLAND TUB DRAIN™\*

|  |       |
|--|-------|
| Island Tub Drain™ <a href="#">BISLDD</a>             | \$260 |
| Cast Iron Island Tub Drain™ <a href="#">BISLDDCI</a> | \$310 |

### IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD\*

|   |      |
|---|------|
| Brass waste kit <a href="#">BDRCBF</a><br>Matte White** <a href="#">32</a> , Chrome <a href="#">07</a> , Brushed Nickel <a href="#">09</a> , Polished Nickel <a href="#">10</a> , Matte Black <a href="#">19</a> , Satin Brass <a href="#">18</a> | \$60 |
|---|------|



Don't forget to indicate the finish for the Integrated waste & overflow and, if needed, for the Brass waste kit.

\* An Island Tub Drain™ and the Brass waste kit are required when there is **no access under the bath**.

\*\* On a FineStone bath, the white Integrated waste & overflow has a Matte Finish.



Made with FineStone®


FineStone® is a high quality solid surface material composed of refined minerals and pure acrylic. Designed with care, this material is non porous, hygienic, and thermal insulant. Its satin finish is easy to clean and will maintain its properties through time.



**OPUS 6434 (FREESTANDING)**



**INSTALLATION**

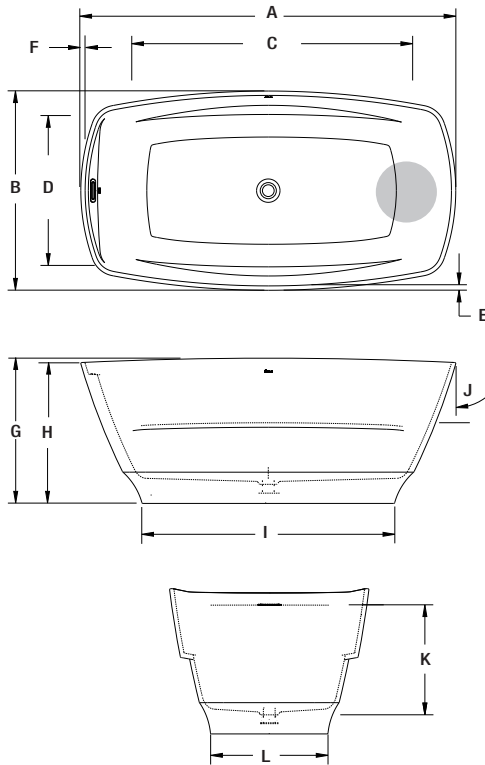

| LETTER | DESCRIPTION          | MEASURE   |           |
|--------|----------------------|-----------|-----------|
|        |                      | TMU       | TUB       |
| A      | Total length         | 64"       | 64"       |
| B      | Total width          | 34"       | 34"       |
| C      | Bathing well length  | 48 15/16" | 47 15/16" |
| D      | Bathing well width   | 22 1/16"  | 23 1/8"   |
| E      | Deck width           | 1 5/8"    | 3/4"      |
| F      | Deck width           | 3/4"      | 3/4"      |
| G      | Total maximal height | 24 3/4"   | 24 3/4"   |
| H      | Total minimal height | 24"       | 24"       |
| I      | Base length          | 45 5/16"  | 43 1/16"  |
| J      | Slope of backrest    | 19°       | 23°       |
| K      | Maximum water level  | 18"       | 18 1/4"   |
| L      | Base width           | 23"       | 20 1/16"  |

● Indicates heated backrest (TMU)

**TECHNICAL SPECIFICATIONS**

|                                  |   |
|----------------------------------|---|
| <b>Hot water supply required</b> | The hot water supply should be 70% or more of the bath's total water capacity.  |
| <b>Turbine</b>                   | Access to the pump must be at least 18" x 22". <b>Standard connection is a 15A, 120 V, 60 Hz</b> , dedicated lines with a GFCI. Air vent necessary: 2" x 4" minimum.  |
| <b>Others</b>                    | <ul style="list-style-type: none"> <li>- The turbine must be <b>remotely installed</b>.</li> <li>- Faucet must be freestanding or wall-mounted.</li> <li>- Controls cannot be installed on the deck of the bath.</li> </ul> |

Our products must be installed by certified professionals only and according to our Installation Instructions as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

|                               | TMU        | TUB        |
|-------------------------------|------------|------------|
| <b>Cutting template</b>       | # 90000089 | # 90000088 |
| <b>Approx. bathtub weight</b> | 380 lb     | 285 lb     |
| <b>Turbine power</b>          |            | 550 W      |
| <b>Air Heater</b>             |            | 600 W      |
| <b>WARRANTY</b>               |            |            |
| Controls                      |            | 5 years    |
| Bath & turbine*               |            | 20 years   |

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

The specifications shown indicate the outer edge dimension and the inside bathing capacity. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.