

origami 6632

66" x 32" x 21"



Product No.

Model 3 1/4" deck	TMU BOOIRI00T-XX	Soaker BOOIRI00N-XX
Model 2" deck	TMU BOOIRI20T-XX	Soaker BOOIRI20N-XX
Model Slim deck 1/2"	TMU BOOIRI10T-XX	Soaker BOOIRI10N-XX

ThermoMasseur (TMU)

Air Jet System	\$6,180
Jets	45
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
AromaFlow†† BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995

Soaker

AromaCloud®** BAROMAC	\$590
AromaFlow†† BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Drop-in: 1/2", 2" & 3 1/4", Alcove (3 walls): 2" & Undermount: 1/2"
No. of bathers	41 US gallons 49
Standard Bath Color	
White 01 Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
 UltraVelour Matte Finish (white only) <i>BVEL1</i>	\$650		
Universal Armrests <i>BGBGU-XX</i>			
 White 01	\$895		
Skirt (2" deck only)		Multifit <i>BSMUL-XX</i>	SJ-1 <i>BSJ1-XX</i>
 White 01  Biscuit 02	\$695	\$715	
Tile Flange (with 2" deck only) (specify right or left)			
Ordered with bath (not installed) <i>BTILEN</i>		\$79	
Factory-installed. Right <i>BTILER</i> , Left <i>BTILEL</i> , Special installation <i>BTILEO</i>		\$155	
Bath Pillow <i>BPILLOW</i>		\$240	
Drain & Overflow		Integrated ZenFlow [†] <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Chrome 07		\$205	\$235
 White 01  Biscuit 02		\$165	\$205
 Brushed Nickel 09		\$205	\$235
 Polished Nickel 10		\$205	\$235
 Oil-rubbed Bronze 11		N/A	N/A
 Matte Black 19  Satin Brass 18		\$260	\$290
 Matte White 32		\$205	\$235
If Required by Construction Code			
Brass drain & overflow kit [‡] <i>BDRCOB</i>		\$240	
Brass drain kit [‡] <i>BDRCB</i>		\$60	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>		\$240	

⚠ Don't forget to indicate the deck height (1/2", 2" or 3 1/4").

1/2" slim deck is available for drop-in and undermount installation only.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed). Not available for undermount
‡ When ordered with Integrated drain & overflow.
†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge). Specify the finish of the drain.


origami 6632

66" x 32" x 21"



Slim deck 1/2"

Technical Specifications

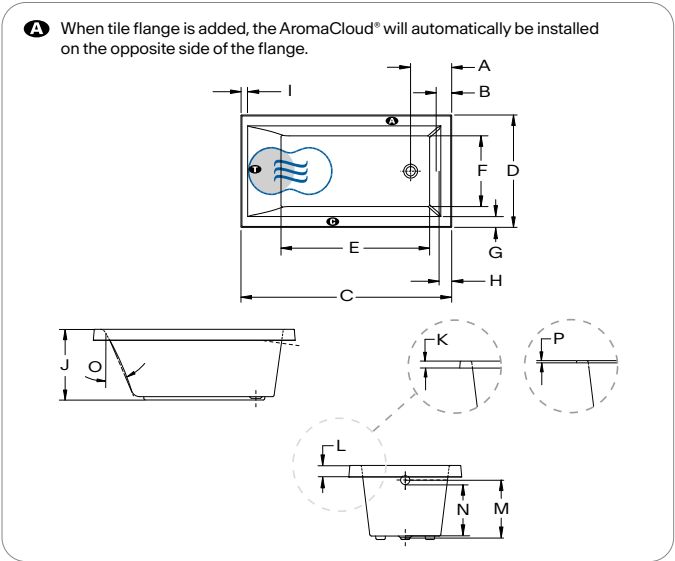

Letter	Description	Measure
A	Outside edge to center drain	11 1/4"
B	Outside edge to overflow	4 1/8"
C	Total length (with 1/2" deck height) Total length (with 2" deck height) Total length (with 3 1/4" deck height)	65 5/8" 65 7/8" 66"
D	Total width (with 1/2" deck height) Total width (with 2" deck height) Total width (with 3 1/4" deck height)	31 5/8" 31 7/8" 32"
E	Bathing well length	49 1/2"
F	Bathing well width	20 7/8"
G	Deck width	3 5/8"
H	Deck width	3 5/8"
I	Deck width at backrest	1 3/8"
J	Height from bottom of bath to top deck	21"
K	Height from bottom of deck to top deck	2"
L	Height from bottom of deck to top deck	3 1/4"
M	Height from bottom of drain to center of overflow	15 5/8"
N	Maximum water level (Drain & overflow 16" x 35") Maximum water level (Integrated drain & overflow) Maximum water level with AromaFlow	13 7/8" 15" 14 1/2"
O	Slope of backrest	24°
P	Height from bottom of deck to top deck	1/2"

A AromaCloud® position **B** Control position when factory-installed (Mia® or DOT)
I Turbine position (TMU) **J** Indicates heated backrest (TMU)
K Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Optional Tile Flange (specify right or left). The water level will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000099
Approx. shipping weight	132 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.