

VIBE 5828

58" x 28" x 21" (FREESTANDING)

Vibe is a collection of therapeutic bathtubs with minimalist and contemporary flair. The collection is perfect for urban city dwellers who want to bring value and refinement to smaller bathrooms.



PRODUCT NO.			
MODEL	TMU	TUB	
Freestanding	BVICRF00T-XX	BVICRF00N-XX	
THERMOMASSEUR (TMU)			\$
Hydro-thermo massage • Air jet system			
Jets			40
1 heated backrest			Included
MiaPlus® Control*			Included
BU-Touch Control Application BUTOUCH		\$	
Geysair®			Included
Illuzio Chromatherapy BCHRO6		\$	
TUB Soaker			\$
Illuzio Chromatherapy BCHRO6			\$
WarmTouchShell® BWTS			\$
DOT control			Included with therapy
FEATURES			
Installation type		Freestanding	
No. of bathers		Imp. gallons	36
US gallons	44		
INTEGRATED WASTE & OVERFLOW BOVERINI-XX			
White 01 , Chrome 07 , Brushed Nickel 09 , Polished Nickel 10 , Matte White with UltraVelour finish 32			Installed & Included
STANDARD COLOR			
			Included
White 01			


OPTIONS (UPCHARGE APPLICABLE)	
COLOR	
	\$
Black / White 66	
FINISH	
UltraVelour Matte Finish (white only) BVEL2	\$
UNIVERSAL ARMRESTS BGBGU-XX NEW	
White 01	\$
INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
Matte Black 19 , Satin Brass 18	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™ BISLDD	\$
Cast Iron Island Tub Drain™ BISLDDCI	\$
IF REQUIRED BY CONSTRUCTION CODE	
Brass waste & overflow kit BDRCOB	\$
Brass waste kit BDRCB	\$

Don't forget to specify the **finish of the integrated waste & overflow**.
 * Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
 ** An Island Tub Drain™ is required when there is **no access under the bath**.

TOTAL PRICE	\$
-------------	----

FOR THE INSTALLER

SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)



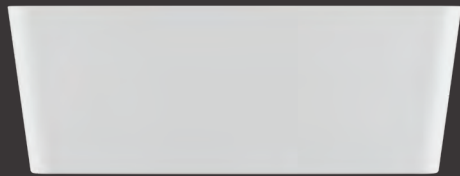


VIBE 5828 (FREESTANDING)



Vibe 5828 With Optional Universal Armrests

INSTALLATION

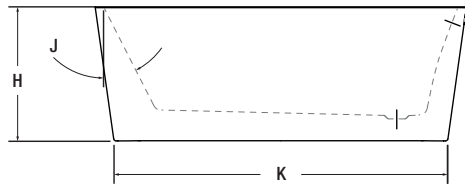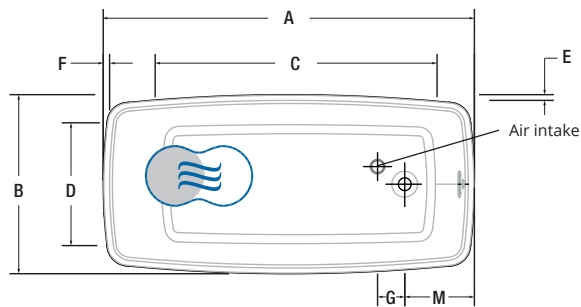

LETTER	DESCRIPTION	MEASURE
A	Total length	58"
B	Total width	28"
C	Bathing well length	44"
D	Bathing well width	19 1/8"
E	Deck width	7/8"
F	Deck width at headrest	1"
G	Center drain to air intake	4 1/4"
H	Total height	21"
I	Maximum water level	14 1/4"
J	Slope of backrest	27°
K	Base length	52 1/8"
L	Base width	22 1/8"
M	Outer edge to center of drain	10 7/8"

- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000078
Approx. shipping weight	225 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.