

VIBE DESIGN 6033

60" x 33" x 21" (FREESTANDING)

Vibe is a collection of therapeutic bathtubs with minimalist and contemporary flair. The collection is perfect for urban city dwellers who want to bring value and refinement to smaller bathrooms.



PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BVDEOF00T-XX	BVDEOF00N-XX

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$8,655
Jets	35
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	\$430
Geysair®	Included
AromaFlow*** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925

TUB Soaker	\$6,430
AromaFlow*** BAROMAF NEW	\$950
Illuzio Chromatherapy BCHRO6	\$925
WarmTouchShell® BWT5	\$1,125
DOT control	Included with therapy

FEATURES

Installation type	Freestanding		
No. of bathers	↓	Imp. gallons	33
US gallons	40		

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

White 01 , Chrome 07 , Brushed Nickel 09 , Polished Nickel 10 , Matte White with UltraVelour finish 32	Installed & Included
--	----------------------

STANDARD COLOR

	Included
White 01	

OPTIONS (UPCHARGE APPLICABLE)

COLOR

	Black / White 66	\$475
---	----------------------------------	-------

FINISH

UltraVelour Matte Finish (white only) BVEL2	\$850
---	-------

UNIVERSAL ARMRESTS [BGBGU-XX](#)

White 01	\$750
--------------------------	-------

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

Matte Black 19 , Satin Brass 18	\$120
---	-------

ISLAND TUB DRAIN™**

Island Tub Drain™ BISLDD	\$260
Cast Iron Island Tub Drain™ BISLDDCI	\$310

IF REQUIRED BY CONSTRUCTION CODE

Brass waste & overflow kit BDRCOB	\$240
Brass waste kit BDRCB	\$60



Don't forget to specify the **finish of the integrated waste & overflow.**

* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.


** An Island Tub Drain™ is required when there is **no access under the bath.**

*** When ordering an AromaFlow, an Integrated waste & overflow is mandatory (Included). Specify the finish of the waste.

FOR THE INSTALLER

SCAN TO VIEW INSTALLATION VIDEO (3:20 MIN)




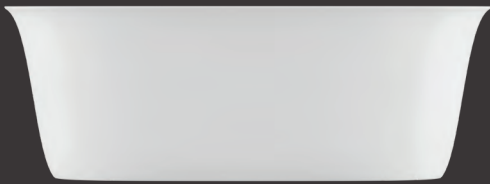

VIBE DESIGN 6033 (FREESTANDING)



INSTALLATION

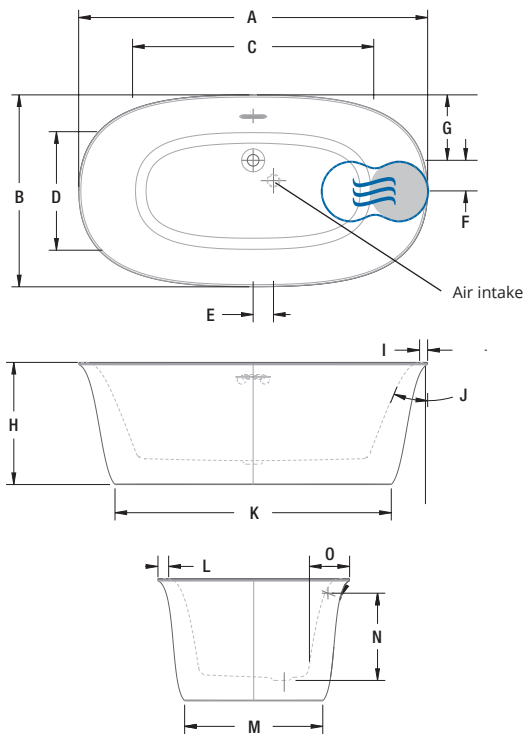

LETTER	DESCRIPTION	MEASURE
A	Total length	60"
B	Total width	33"
C	Bathing well length	41 1/2"
D	Bathing well width	20 3/8"
E	Center of air intake to center of drain (front)	3 1/2"
F	Center of air intake to center of drain (side)	3 1/2"
G	Outer edge to center of drain	11 1/4"
H	Total height	21"
I	Deck width at headrest	2 1/2"
J	Slope of backrests	22°
K	Base length	47 1/2"
L	Deck width	2"
M	Base width	23 3/4"
N	Maximum water level Maximum water level with AromaFlow	14 5/16" 13"
O	Minimum spout reach	6 1/2"

- Indicates heated backrest (TMU)
- ⊕ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - Controls cannot be installed on the deck of the bath. - The water level will be lower when an AromaFlow is installed.

Cutting template	# 90000081
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.