
MONARCH 6032L

60" x 32" x 20"

Monarch is a refined collection of therapeutic baths with distinctive Quartz deck surfaces, for a look that's noble and pure.

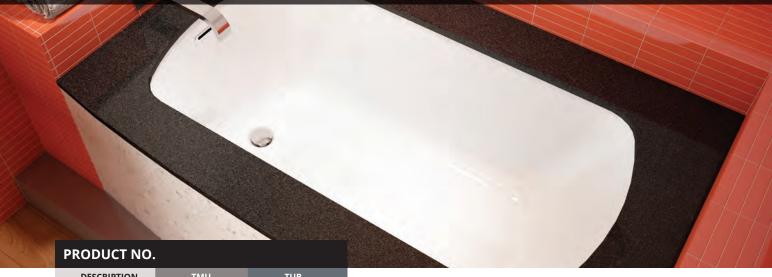


DESCRIPTION	ТМИ	TUB	
Standard (S)*	BMODHB0LT-XX	BMODHB0LN-XX	
Grand Luxury (GL)*	BMLDHB0LT-XX	BMLDHB0LN-XX	

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	GL \$
Jets	37
1 heated backrest	Included
MiaPlus® Control (not installed)	Included
BU-Touch Control Application BUTOUCH NEW	\$
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	s \$	GL \$	
AromaCloud®			N/A
Illuzio Chromatherapy BCHRO6		\$	
WarmTouchShell® BWTS		\$	
DOT control		Included with	therapy

FEATURES					
Installation type	Installation type			Drop-in & Alcove (3 walls)	
No. of bathers	•	Imp. gallo	ns	42	
US gallons	50				
INTEGRATED WASTE 8	& OVERFLO	W BOVERINI-	xx		
White 01, Chrome 07, Bru	White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10				
STANDARD COLOR (in	STANDARD COLOR (inner shell)				
White 01				Included	
QUARTZ DECK COLOR	l.	В	S* DMO6032L-XX	GL* BDML6032L-XX	
Grey Noka 22 Expo 21	Jet Black 23	Lagos Blue 24	Included	Included	

OPTIONS (UPCHARGE APPLICABLE)			
QUARTZ DECK COLOR	S* BDMO6032L-XX BDML	GL * .6032L	
Quasar Light 25	\$ \$		
Piatra Bianco Woodlands Grey 26 Drift 31 30	\$ \$		
Statuario Maximus 29	\$ \$		
FINISH (inner shell)			
UltraVelour Matte Finish (White only) BVEL	\$		
INTEGRATED WASTE & OVERFLOW BO	VERINI-XX		
Matte Black 19, Black Chrome 12, Satin Bra	sss 18 \$		
WASTE & OVERFLOW 16" x 35" BOVER1	6-XX		
Chrome 07	\$		
White 01	\$		
Brushed Nickel 09, Polished Nickel 10, Oil-r	rubbed Bronze 11 \$		
QUARTZ SKIRT 6018 (60" x 18 7/8") BSM	6018-XX		
Grey Expo 21, Noka 22	\$		
Jet Black 23, Lagos Blue 24	\$		
Quasar Light 25	\$		
Piatra Grey 26, Bianco Drift 31, Woodlands	30 \$		
Statuario Maximus 29	\$		
TILE FLANGE			
Ordered with bath (not installed) BTILEN	\$		
Factory-installed. Left BTILEL	\$		
IF REQUIRED BY CONSTRUCTION CODE			
Brass waste & overflow kit** BDRCOB	\$		
Brass waste kit** BDRCB	\$		
16" x 35" Cable driven brass waste & overf	low kit BOVERBR-XX \$		





MONARCH 6032L CURVED DECK - FRONT

INSTALLATION G

LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	31 1/2"
С	Bathing well length (at height of jets)	43 5/8"
D	Bathing well width (at height of jets)	19 5/8"
E	Deck width (edges)	4"
F	Deck width (curved side)	5 1/8"
G	Deck width (straight side)	3 5/8"
Н	Bath height	19 7/8"
ı	Height from drain to center of overflow	15 3/8"
J	Outside edge to center drain	11 1/8"
K	Slope of backrest	24°
L	Quartz deck height	3/4"

Turbine position (TMU)

Indicates heated backrest (TMU)

Indicates WarmTouchShell® position (TUB)




Don't forget that this model is available in White only with choice of quartz deck color. Don't forget to specify the finish of the integrated waste & overflow.

*Standard: Quartz deck with seam. Grand Luxury: one piece Quartz deck.

**When ordered with integrated waste & overflow.

TOTAL PRICE

TECHNICAL SPECIFICATIONS					
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Approx. shipping weight	230 lbs		
supply required	Assessment the second provided the second se	Turbine power	550 W		
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI.	Air heater	600 W		
		WARRANTY			
Others	The GEYSAIR must always be accessible and connected to the hot water supply (provide access). Control cannot be installed on the Quartz deck.	Controls-LED-Geysair*	5 years		
	- Optional tile flange.	Quartz deck*	15 years		
	st be installed by certified professionals only and according to our Monarch Installation Manual as well as l/state and local building codes and regulations (www.bainultra.com/documentation/documentation).	Bath & turbine*	20 years		







The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.