
MONARCH 6035

60" x 35" x 20"

Monarch is a refined collection of therapeutic baths with distinctive Quartz deck surfaces, for a look that's noble and pure.

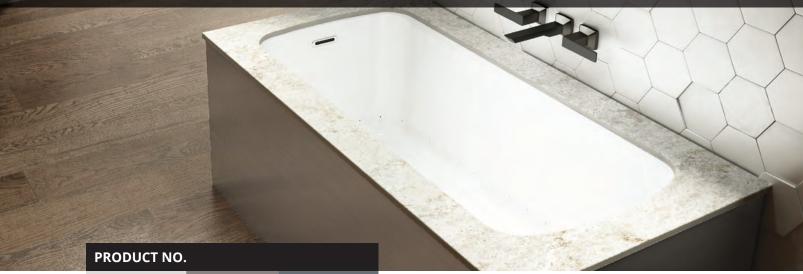

DESCRIPTION	TMU	TUB	
Standard (S)*	BMO6RB00T-XX	BMO6RB00N-XX	
Grand Luxury (GL)*	BML6RB00T-XX	BML6RB00N-XX	

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	GL \$
Jets	40
1 heated backrest	Included
MiaPlus® Control (not installed)	Included
BU-Touch Control Application BUTOUCH NEW	\$
Geysair®	Included
AromaCloud®	N/A
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	s \$	GL \$
AromaCloud®		N/A
Illuzio Chromatherapy BCHRO6		\$
WarmTouchShell® BWTS		\$
DOT control		Included with therapy

FEATURES					
Installation type	Installation type			Drop-in & Alcove (3 walls)	
No. of bathers	•	Imp. gallo	ns	40	
US gallons	48				
INTEGRATED WASTE	& OVERFLO	W BOVERINI-	xx		
White 01, Chrome 07, Br	White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10				
STANDARD COLOR (in	STANDARD COLOR (inner shell)				
White 01				Included	
QUARTZ DECK COLO	R	В	S* DMO6035-XX	GL* BDML6035-XX	
Grey Noka 22 Expo 21	Jet Black 23	Lagos Blue 24	Included	Included	


OPTIONS (UPCHARGE APPLICABLE)			
QUARTZ DECK COLOR	S* BDMO6035-XX	GL* BDML6035-X	
Quasar Light 25	\$	\$	
Piatra Bianco Woodlands Grey 26 Drift 31 30	\$	\$	
Statuario Maximus 29	\$	\$	
FINISH (inner shell)			
UltraVelour Matte Finish (White only) BVEL		\$	
INTEGRATED WASTE & OVERFLOW BO	VERINI-XX		
Matte Black 19, Black Chrome 12, Satin Bra	ss 18	\$	
WASTE & OVERFLOW 16" x 35" BOVER1	6-XX		
Chrome 07		\$	
White 01		\$	
Brushed Nickel 09, Polished Nickel 10, Oil-r	ubbed Bronze 11	\$	
QUARTZ SKIRT 6018 (60" x 18 7/8") BSM6018-XX			
Grey Expo 21, Noka 22		\$	
Jet Black 23, Lagos Blue 24		\$	
Quasar Light 25		\$	
Piatra Grey 26, Bianco Drift 31, Woodlands	30	\$	
Statuario Maximus 29		\$	
TILE FLANGE (specify right or left)			
Ordered with bath (not installed) BTILEN		\$	
Factory-installed. Right BTILER, Left BTILEL, Special installation BTILEO		\$	
IF REQUIRED BY CONSTRUCTION COD			
Brass waste & overflow kit** BDRCOB		\$	
Brass waste kit** BDRCB		\$	
16" x 35" Cable driven brass waste & overflo	ow kit BOVERBR-XX	\$	






MONARCH 6035

INSTALLATION

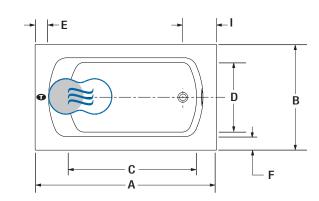



LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	35"
С	Bathing well length (at height of jets)	42 3/8"
D	Bathing well width (at height of jets)	22 3/4"
E	Deck width (edges)	4 5/8"
F	Deck width (sides)	4 5/8"
G	Bath height	19 7/8"
Н	Height from drain to center of overflow	15 3/8"
ı	Outside edge to center drain	11 1/8"
J	Slope of backrest	24°
K	Quartz deck height	3/4"

Turbine position (TMU)

Indicates heated backrest (TMU)

 Indicates WarmTouchShell® position (TUB)




Don't forget that this model is available in White only with choice of quartz deck color. Don't forget to specify the finish of the integrated waste & overflow.

* Standard: Quartz deck with seam. Grand Luxury: one piece Quartz deck.

** When ordered with integrated waste & overflow.

TOTAL PRICE

TECHNICAL SP	ECIFICATIONS			
Hot water	Should be 70% of water capacity of TUB or greater.	Approx. shipping weight	240 lbs	
supply required Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz, dedicated the pump must be at least 18" x 22". Standard connection is 20" x 22"	Turbine power	550 W		
Turbine	line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is	Air heater	600 W	
	needed 15 A. 120 V, 60 hz, dedicated line with a GFCI.	WARRANTY		
Others	 The GEYSAIR must always be accessible and connected to the hot water supply (provide access). Control cannot be installed on the Quartz deck. 	Controls-LED-Geysair*	5 years	
	- Optional tile flange (specify right or left).	Quartz deck*	15 years	
	t be installed by certified professionals only and according to our Monarch Installation Manual as well as state and local building codes and regulations (www.bainultra.com/documentation/documentation).	Bath & turbine*	20 years	







The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.