

DESCRIPTION	тми	TUB	
Freestanding	BVDEOF00T-XX	BVDEOF00N-XX	

THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system	\$
Jets	35
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH NEW	\$
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$

TUB Soaker	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

FEATURES				
Installation type		Freestanding		
No. of bathers	•	Imp. gallons		33
US gallons	40			
INTEGRATED WASTE & OVERFLOW BOVERINI-XX				
White 01, Chrome 07, Brushed Nickel 09, Polished Nickel 10		Installed & Included		
STANDARD COLOR				
White 01				Included

OPTIONS (UPCHARGE APPLICABLE)	
COLOR	
Black / White 66	\$
FINISH	
UltraVelour Matte Finish (White only) BVEL	\$
INTEGRATED WASTE & OVERFLOW BOVERINI-XX	
Matte Black 19, Black Chrome 12, Satin Brass 18	\$
ISLAND TUB DRAIN™**	
Island Tub Drain™ BISLDD	\$
Cast Iron Island Tub Drain™ BISLDDCI	\$
IF REQUIRED BY CONSTRUCTION CODE	
Brass waste & overflow kit BDRCOB	\$
Brass waste kit BDRCB	\$



- Don't forget to specify the **finish of the integrated waste & overflow.**
 - * Control must be wall-mounted. Faucets must be freestanding
- or wall-mounted.


 ** An Island Tub Drain™ is required when there is **no access under**the bath.

TOTAL PRICE





VIBE DESIGN 6033 (FREESTANDING)

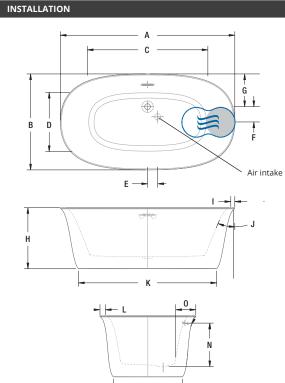

LETTER	DESCRIPTION	MEASURE
Α	Total length	60"
В	Total width	33"
С	Bathing well length	41 1/2"
D	Bathing well width	20 3/8"
E	Center of air intake to center of drain (front)	3 1/2"
F	Center of air intake to center of drain (side)	3 1/2"
G	Outer edge to center of drain	11 1/4"
н	Total height	21"
I	Deck width at headrest	2 1/2"
J	Slope of backrest	22°
K	Base length	47 1/2"
L	Deck width	2"
М	Base width	23 3/4"
N	Maximum water level	14 3/8"
0	Minimum spout reach	6 1/2"

Indicates heated backrest (TMU)

Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS				
Hot water supply required	Should be 70% of water capacity of TUB or greater.	Cutting template	# 90000081	
supply required	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 hz , dedicated	Approx. shipping weight	230 lbs	
Turbine line with a Ground-Fault Circuit I	line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is	Turbine power	550 W	
	needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.	Air heater	600 W	
Others - Faucet must be freestanding or wall-mo - The turbine must be remotely installed	 The GEYSAIR must always be accessible and connected to the hot water supply (provide access). Faucet must be freestanding or wall-mounted. 	WARRANTY		
	- The turbine must be remotely installed Controls cannot be installed on the deck of the bath.	Controls-LED-Geysair*	5 years	
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).		Bath & turbine*	20 years	
		* Some restrictions apply www.bainult	ra.com/warranty	





The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.